


**STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO**

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

JÖNKÖPING TOWER 118.255

RNAV (GNSS) RWY 19
DEVNI 4L, NEGAS 4L.

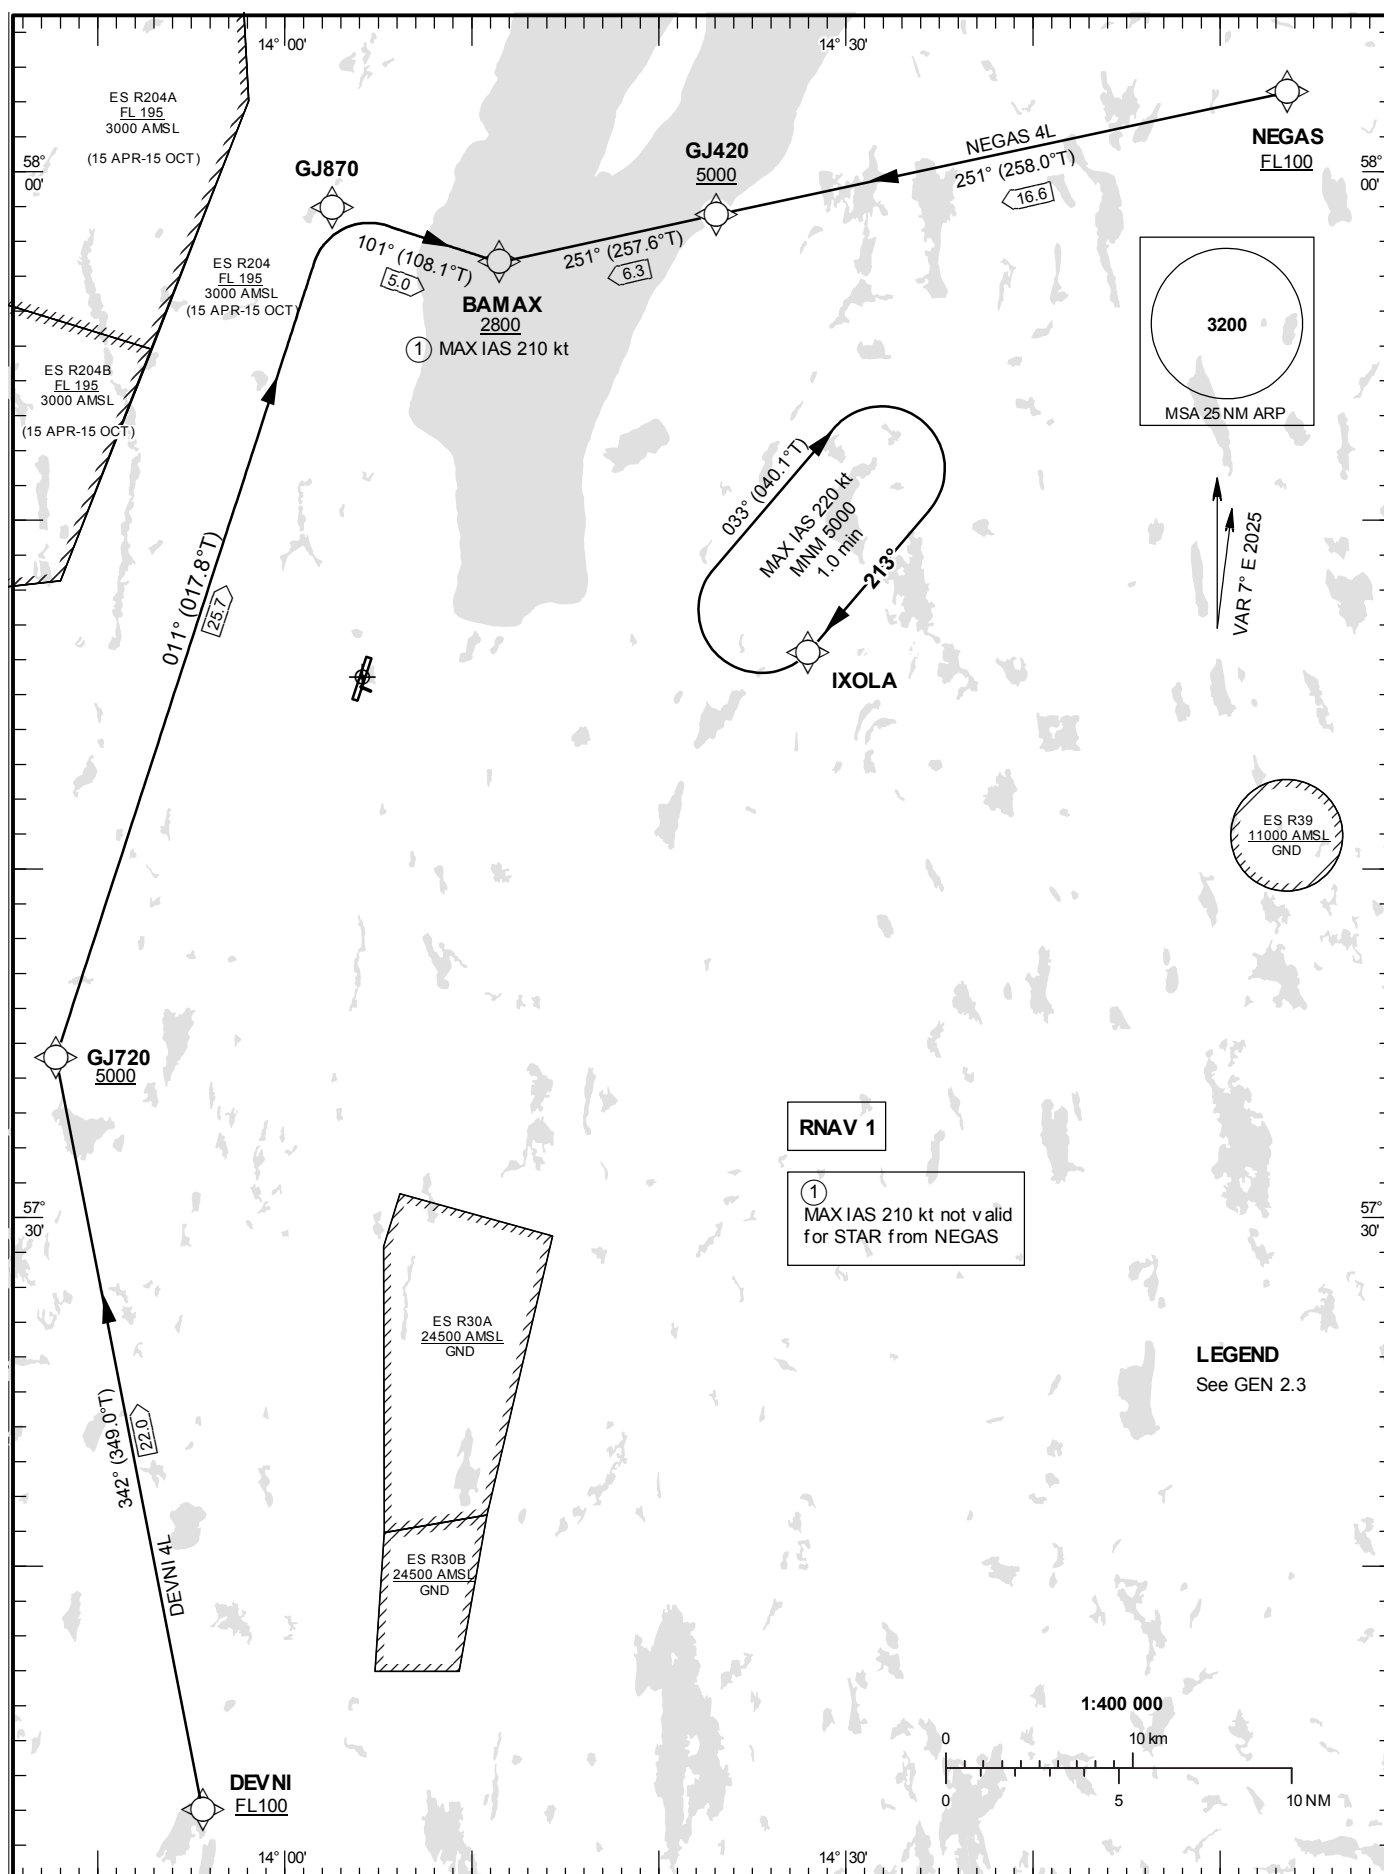

CHANGE: Editorial

JÖNKÖPING

Prescribed Coding of RNAV STAR for RWY 19

DEVNI 4L

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF | DEVNI | - | - | - | - | +FL100 | - | - | - | RNAV 1 |
| TF | GJ720 | - | 342°(349.0°) | 22.0 | - | +5000 | - | - | - | RNAV 1 |
| TF | GJ870 | - | 011°(017.8°) | 25.7 | - | - | - | - | - | RNAV 1 |
| TF | BAMAX | - | 101°(108.0°) | 5.0 | - | +2800 | -210 | - | - | RNAV 1 |

STAR instruction: DEVNI (FL100 or above) – GJ720 (5000 ft or above) – GJ870 – BAMAX (2800 ft or above, MAX IAS 210 kt)

NEGAS 4L

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF | NEGAS | - | - | - | - | +FL100 | - | - | - | RNAV 1 |
| TF | GJ420 | - | 251°(258.0°) | 16.6 | - | +5000 | - | - | - | RNAV 1 |
| TF | BAMAX | - | 251°(257.6°) | 6.3 | - | +2800 | - | - | - | RNAV 1 |

STAR instruction: NEGAS (FL100 or above) – GJ420 (5000 ft or above) – BAMAX (2800 ft or above)