


STOCKHOLM/Skavsta
RNAV (GNSS) SID RWY 08

**STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO**

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

SKAVSTA TOWER	127.705
ÖSTGÖTA APPROACH	132.955

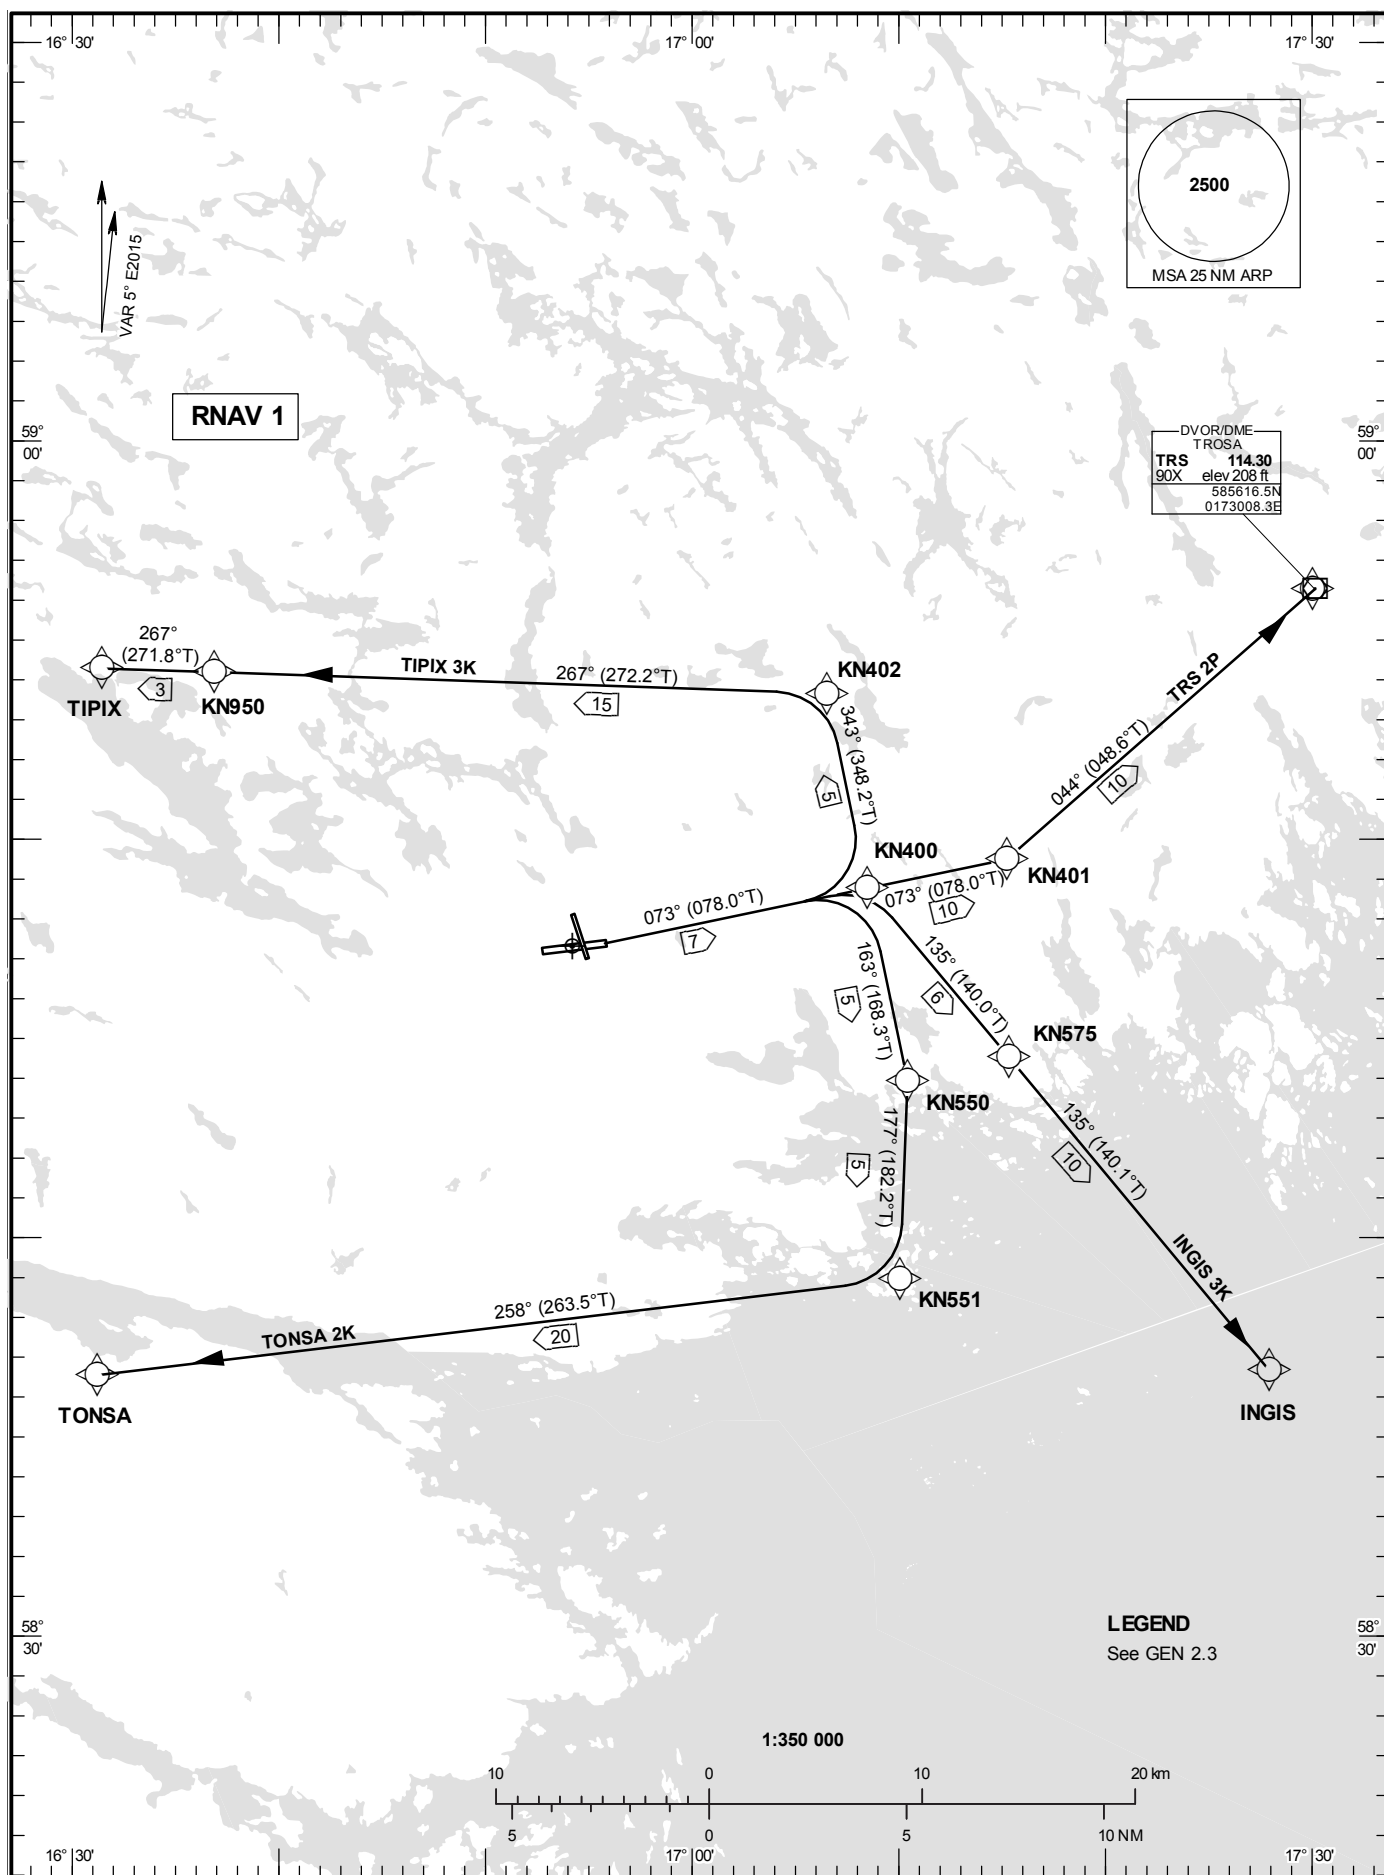

CHANGE: Editorial

STOCKHOLM/Skavsta**Prescribed Coding of RNAV SID for RWY 08****INGIS 3K**

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN400	-	073°(078.0°)	6.7	R	-	-	-	TRS	RNAV 1
TF	KN575	-	135°(140.0°)	5.5	-	-	-	-	-	RNAV 1
TF	INGIS	-	135°(140.1°)	10.3	-	-	-	-	-	RNAV 1

MNM climb gradient 7.4% (450 ft/NM) is required to stay inside controlled airspace.

SID instruction: KN400 – KN575 – INGIS

TIPIX 3K

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN400	-	073°(078.0°)	6.7	L	-	-	-	TRS	RNAV 1
TF	KN402	-	343°(348.2°)	5.0	-	+2000	-220	-	-	RNAV 1
TF	KN950	-	267°(272.2°)	15.4	-	-	-	-	-	RNAV 1
TF	TIPIX	-	267°(271.8°)	2.8	-	-	-	-	-	RNAV 1

SID instruction: KN400 – KN402 (max IAS 220 kt until KN402) – KN950 – TIPIX

TONSA 2K

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN400	-	073°(078.0°)	6.7	R	-	-	-	TRS	RNAV 1
TF	KN550	-	163°(168.3°)	4.9	-	+2000	-220	-	-	RNAV 1
TF	KN551	-	177°(182.2°)	5.0	-	-	-	-	-	RNAV 1
TF	TONSA	-	258°(263.5°)	20.4	-	-	-	-	-	RNAV 1

SID instruction: KN400 – KN550 (max IAS 220 kt until KN550) – KN551 – TONSA

TRS 2P

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN401	-	073°(078.0°)	10.2	L	-	-	-	TRS	RNAV 1
TF	TRS	-	044°(048.6°)	10.3	-	-	-	-	-	RNAV 1

SID instruction: KN401 – TRS