



ARP 564127N 0124912E

AD ELEV 101 FEET

LEGEND See GEN 2.3

Dimensions in m, ELEV in ft

TWY NR	Width	Surface Bearing strength	Day marking		Taxiway lighting	
			Centerline Holding	Edge Centerline	RGL Stopbar	
A	10 m	CONC PCN 25 F/C/X/T	CL	EDGE		
C	23 m	ASPH PCN 45 F/C/X/T	CL HLDG	EDGE	RGL	
D	15 m	CONC PCN 25 F/C/X/T	CL HLDG	EDGE	RGL	
F	10 m	CONC PCN 25 F/C/X/T	CL HLDG	EDGE	RGL	
M	15 m	ASPH PCN 45 F/C/X/T	CL HLDG	EDGE	RGL	
N	15 m	ASPH PCN 45 F/C/X/T	CL	EDGE		
W	7.5 m	ASPH+GRASS	CL			

INS Coordinates for Aircraft Stands			
APRON Surface Bearing strength	NR	COORD	ELEV
1 ASPH PCN 45 F/C/X/T			
CIV ASPH PCN 45 F/C/X/T			
EAST CONC PCN 45 F/C/X/T			


CHANGE: Editorial

AIP SWEDEN

TWR 130.105

AIRAC AIP AMDT 3/2025 12 JUN 2025

RWY NR	TRUE & MAG BRG	THR PSN Geoid undulation	Bearing Strength	THR ELEV and highest ELEV of TDZ of precision APCH RWY	Declared distances				Approach and runway lighting					
					TORA	TODA	ASDA	LDA	APCH	THR TRID TDZ	VASIS (MEHT)	RWY CL	Edge	End
01	006.20° GEO 002° MAG	564051.49N 0124905.53E GUND 120 ft	PCN 45 F/C/X/T	THR 64 ft	2268	2268	2268	2268	SALS 420 m LIL/LIH	THR Green	PAPI Left/3.25° (55.8 ft)	2268/30 m 0-1368 m white 1368-1968 m white/red 1968-2268 m red LIH	2268/60 m White Caution zone 600 m yellow LIL/LIH	Red
19	186.20° GEO 182° MAG	564204.39N 0124919.93E GUND 120.3 ft	PCN 45 F/C/X/T	THR 84.2 ft TDZ 102 ft	2268	2268	2268	2268	Barrette CL 885 m LIH	THR Green	PAPI Left/3.00° (50.8 ft)	2268/30 m 0-1368 m white 1368-1968 m white/red 1968-2268 m red LIH	2268/60 m White Caution zone 600 m yellow LIL/LIH	Red
06	052.24° GEO 048° MAG	564103.45N 0124825.93E GUND 120 ft		THR 62 ft	609	609	609	609						
24	232.24° GEO 228° MAG	564115.50N 0124854.21E GUND 120 ft		THR 70 ft	609	609	609	609						

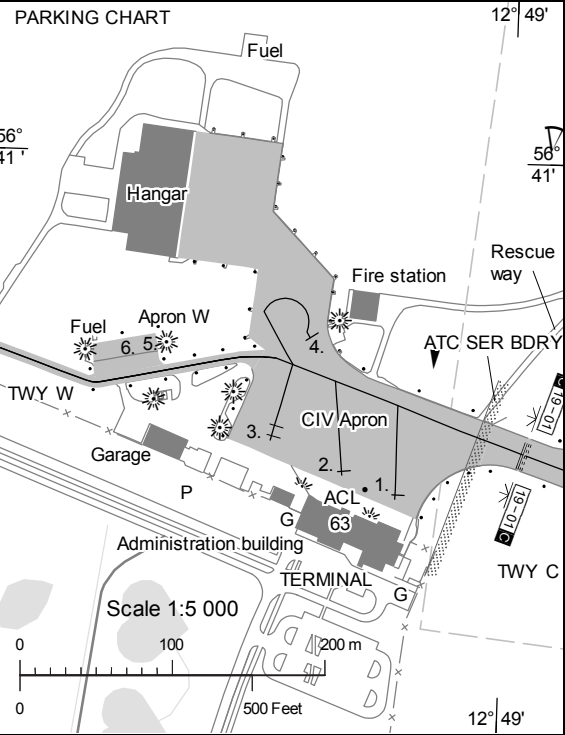

AERODROME CHART - ICAO

AD 2 ESM 2-1
HALMSTAD