


**STANDARD INSTRUMENT  
ARRIVAL CHART (STAR) -  
ICAO**

HGT and ALT in ft  
BRG are MAG  
TA 5000 ft AMSL

SUNDSVALL TOWER	129.555
SUNDSVALL ATIS	127.405

**SUNDSVALL-TIMRÅ  
RNAV (GNSS) STAR  
RWY 34**

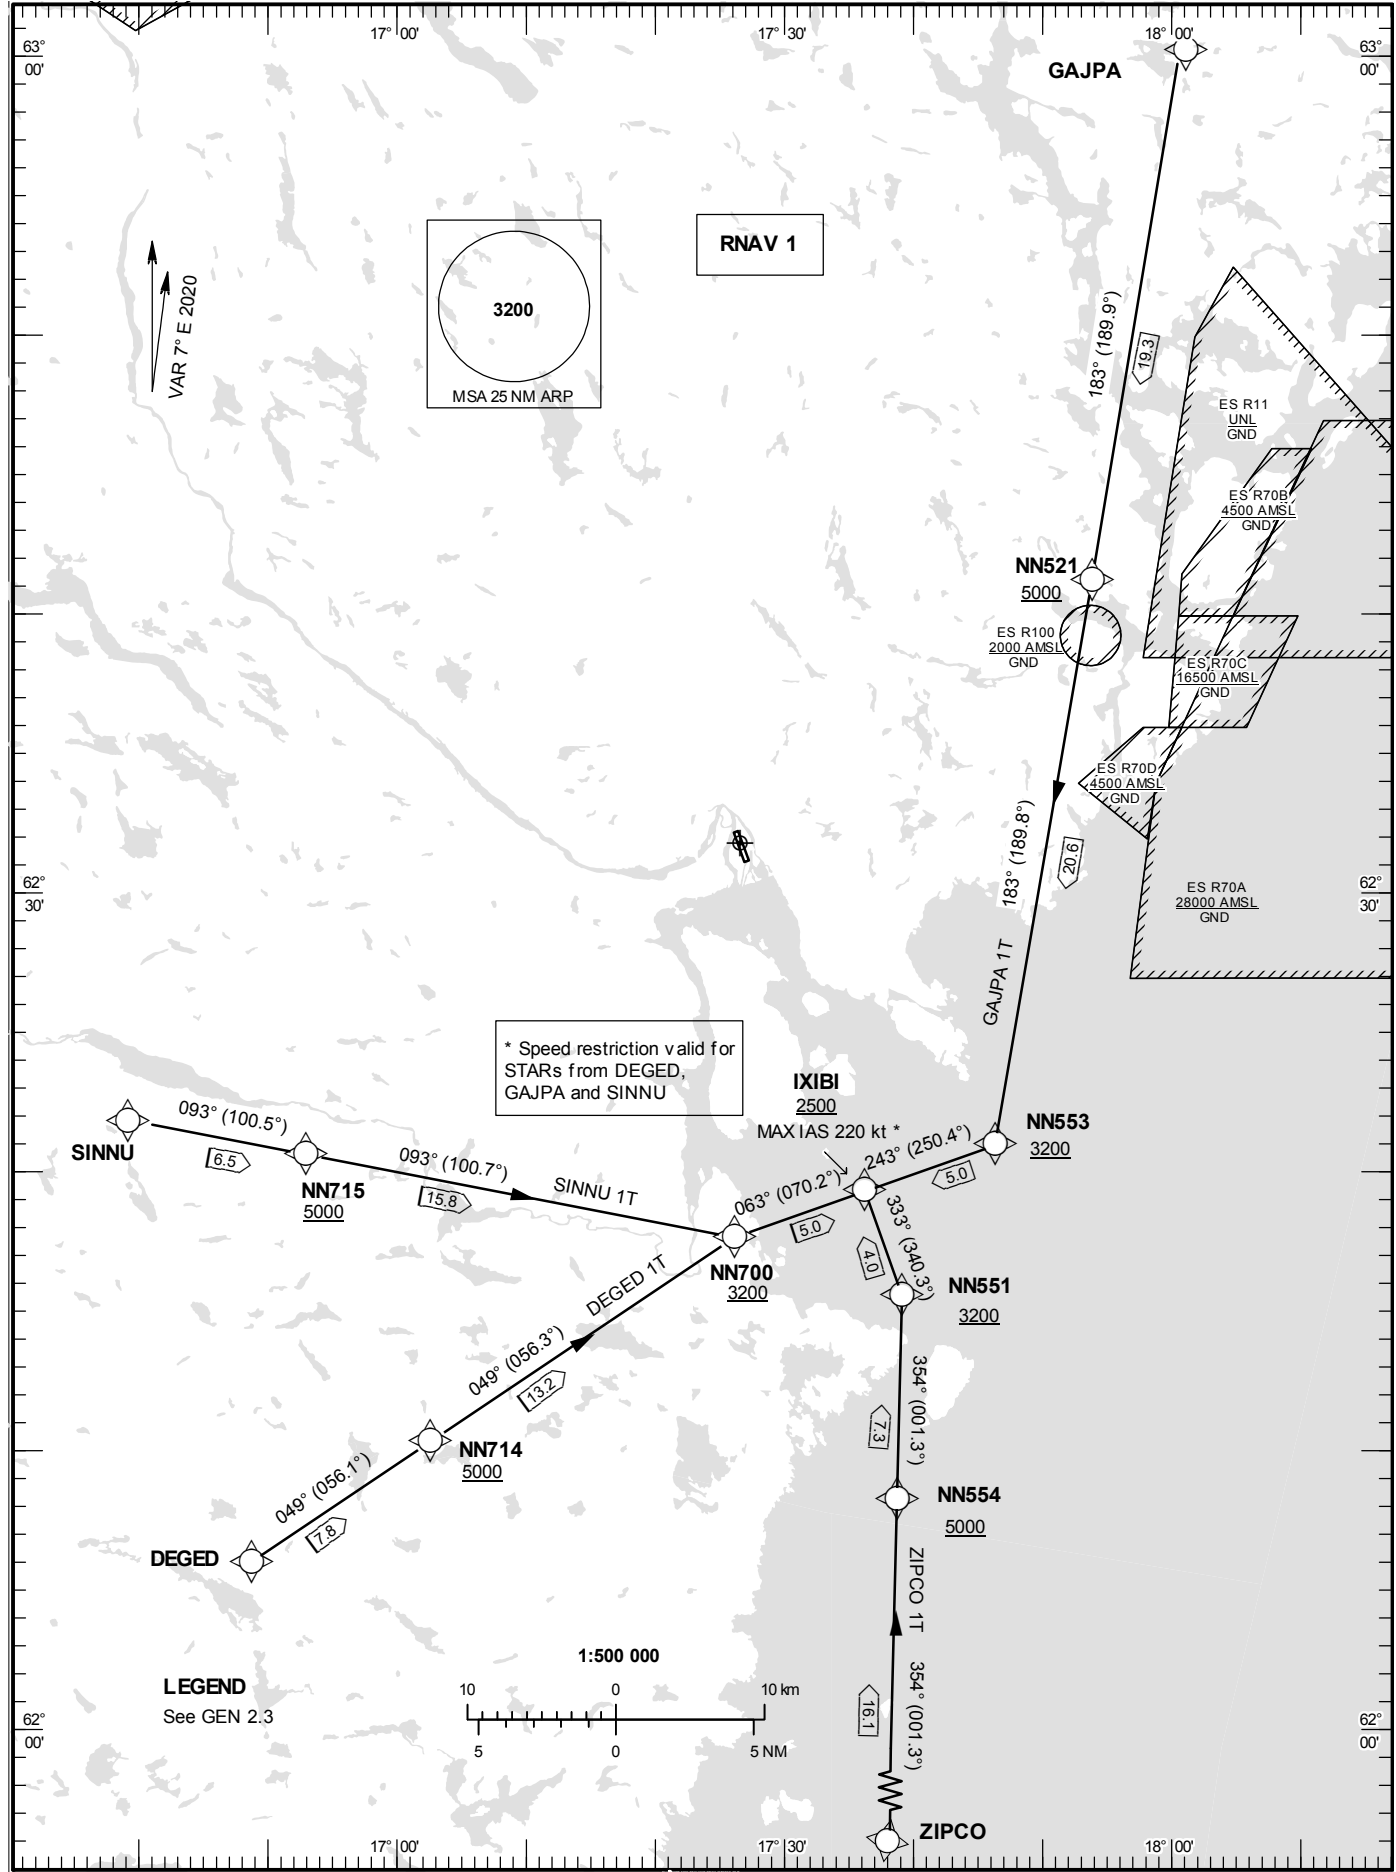

CHANGE: Editorial

**SUNDSVALL-TIMRÅ****Prescribed Coding of RNAV STAR for RWY 34****DEGED 1T**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	DEGED	-	-	-	-	-	-	-	-	RNAV 1
TF	NN714	-	049° (056.1°)	7.8	-	+5000	-	-	-	RNAV 1
TF	NN700	-	049° (056.3°)	13.2	-	+3200	-	-	-	RNAV 1
TF	IXIBI	-	063° (070.2°)	5.0	-	+2500	-220	-	-	RNAV 1

STAR instruction: DEGED – NN714 (5000 ft or above) – NN700 (3200 ft or above) – IXIBI (2500 ft or above, max IAS 220 kt)

**GAJPA 1T**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	GAJPA	-	-	-	-	-	-	-	-	RNAV 1
TF	NN521	-	183° (189.9°)	19.3	-	+5000	-	-	-	RNAV 1
TF	NN553	-	183° (189.8°)	20.6	-	+3200	-	-	-	RNAV 1
TF	IXIBI	-	243° (250.4°)	5.0	-	+2500	-220	-	-	RNAV 1

STAR instruction: GAJPA – NN521 (5000 or above) – NN553 (3200 ft or above) – IXIBI (2500 ft or above, max IAS 220 kt)

**SINNU 1T**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	SINNU	-	-	-	-	-	-	-	-	RNAV 1
TF	NN715	-	093° (100.5°)	6.5	-	+5000	-	-	-	RNAV 1
TF	NN700	-	093° (100.7°)	15.8	-	+3200	-	-	-	RNAV 1
TF	IXIBI	-	063° (070.2°)	5.0	-	+2500	-220	-	-	RNAV 1

STAR instruction: SINNU – NN715 (5000 ft or above) – NN700 (3200 ft or above) – IXIBI (2500 ft or above, max IAS 220 kt)

**ZIPCO 1T**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	ZIPCO	-	-	-	-	-	-	-	-	RNAV 1
TF	NN554	-	354° (001.3°)	16.1	-	+5000	-	-	-	RNAV 1
TF	NN551	-	354° (001.3°)	7.3	-	+3200	-	-	-	RNAV 1
TF	IXIBI	-	333° (340.3°)	4.0	-	+2500	-	-	-	RNAV 1

STAR instruction: ZIPCO – NN554 (5000 ft or above) – NN551 (3200 ft or above) – IBIXI (2500 ft or above)