


STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

JÖNKÖPING TOWER 118.255

RNAV (GNSS) RWY 19
BENGI 3J, DEVNI 3J, NEGAS 3J.

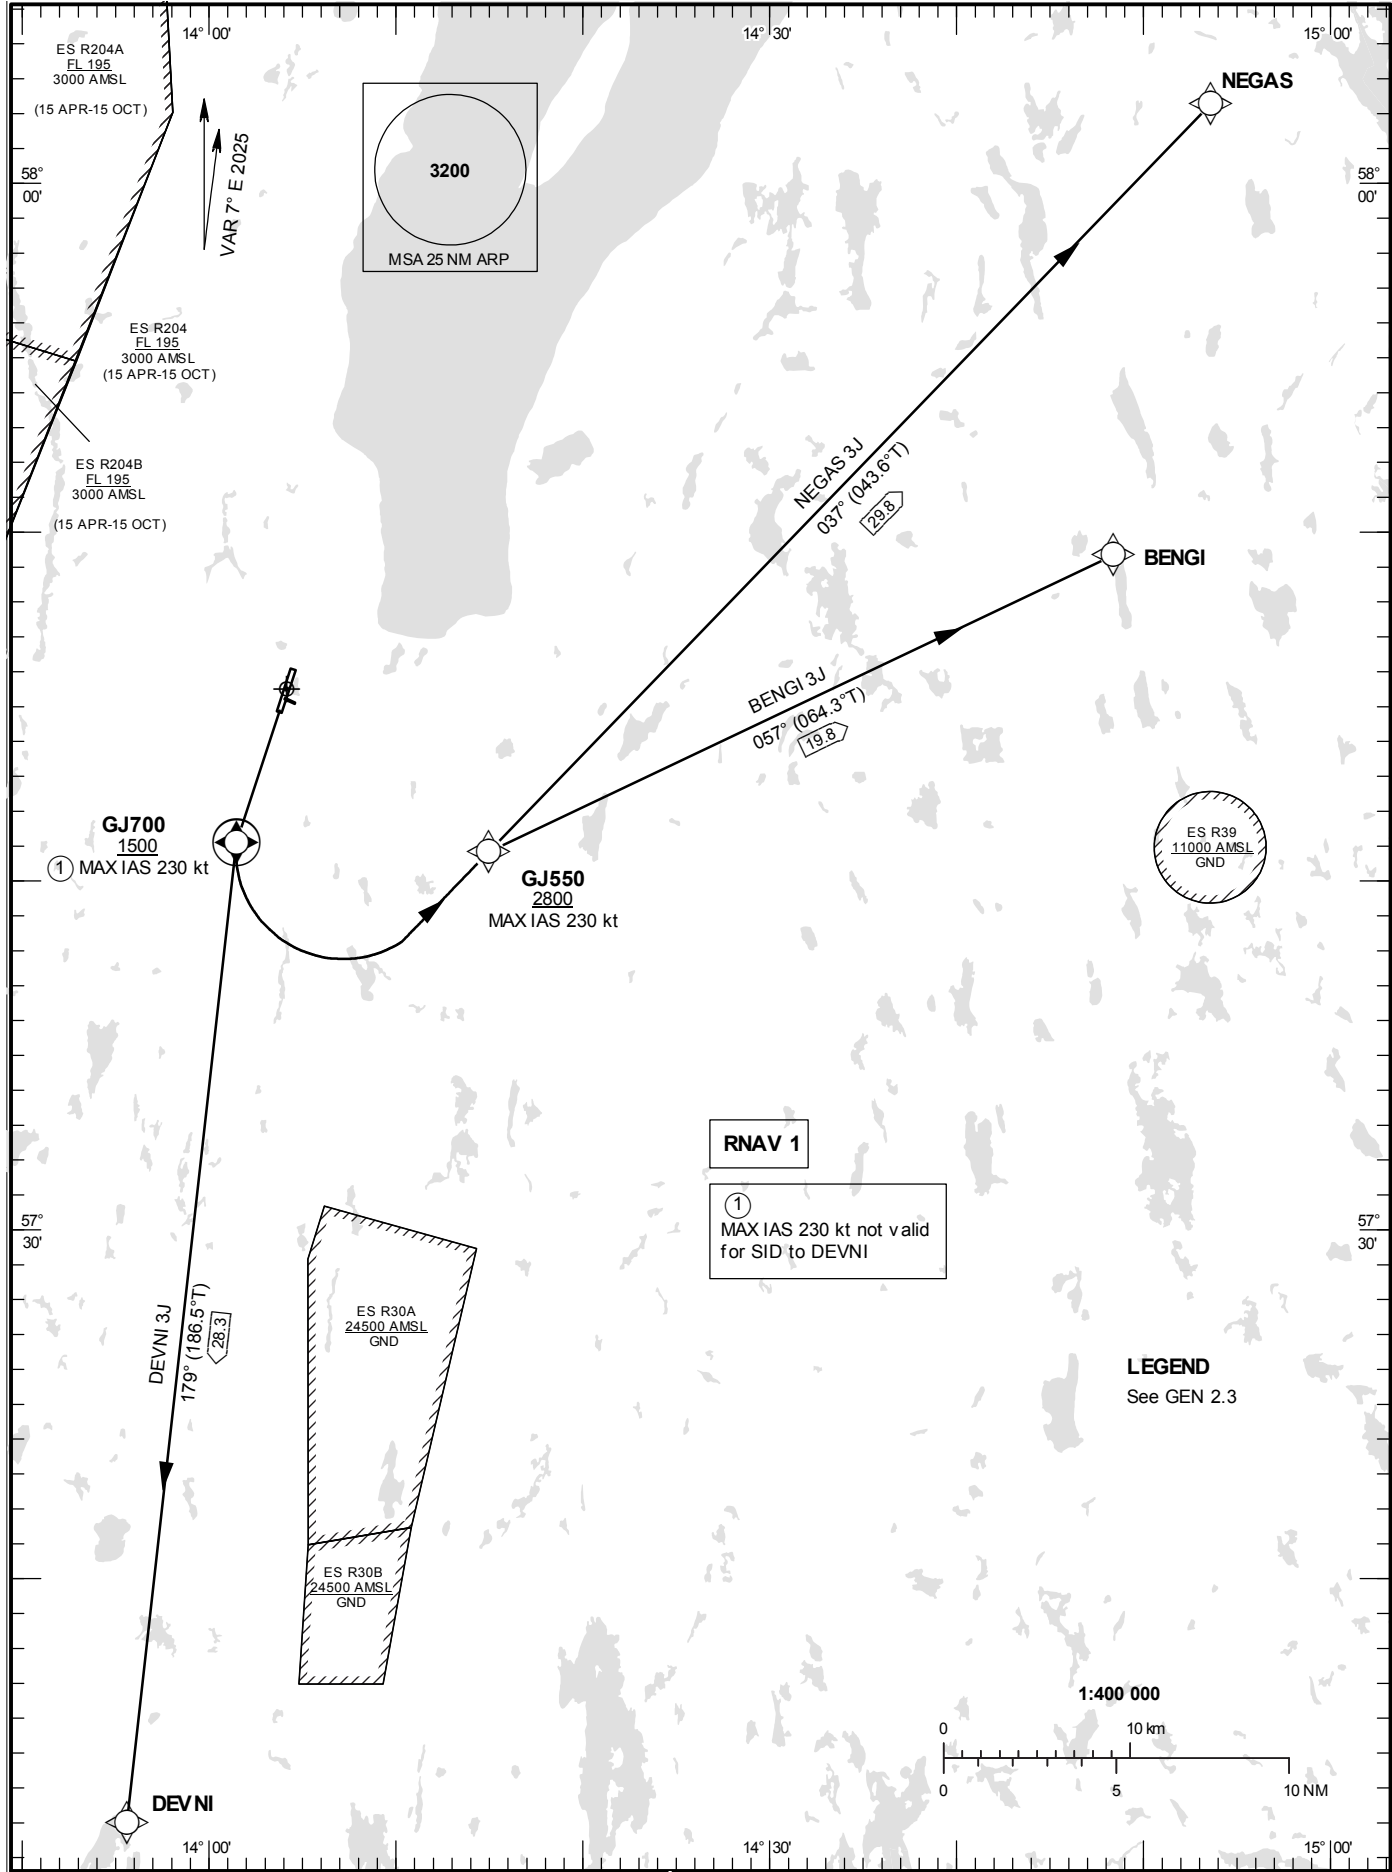

CHANGE: Editorial

JÖNKÖPING

Prescribed Coding of RNAV SID for RWY 19

BENGI 3J

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
DF	GJ700	Y	-	-	-	+1500	-230	-	-	RNAV 1
DF	GJ550	-	-	-	L	+2800	-230	-	-	RNAV 1
TF	BENGI	-	057°(064.3°)	19.8	-	-	-	-	-	RNAV 1

SID instruction: GJ700 (1500 ft or above, MAX IAS 230 kt) – GJ550 (2800 ft or above, MAX IAS 230 kt) – BENGI

DEVNI 3J

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
DF	GJ700	Y	-	-	-	+1500	-	-	-	RNAV 1
TF	DEVNI	-	179°(186.5°)	28.3	-	-	-	-	-	RNAV 1

SID instruction: GJ700 (1500 ft or above) – DEVNI

NEGAS 3J

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
DF	GJ700	Y	-	-	-	+1500	-230	-	-	RNAV 1
DF	GJ550	-	-	-	L	+2800	-230	-	-	RNAV 1
TF	NEGAS	-	037°(043.6°)	29.8	-	-	-	-	-	RNAV 1

SID instruction: GJ700 (1500 ft or above, MAX IAS 230 kt) – GJ550 (2800 ft or above, MAX IAS 230 kt) – NEGAS