


STANDARD INSTRUMENT  
ARRIVAL CHART (STAR) -  
ICAO

HGT and ALT in ft  
BRG are MAG (True)  
TA 5000 ft AMSL

|                   |         |
|-------------------|---------|
| LANDVETTER TOWER  | 118.605 |
| LANDVETTER ATIS   | 118.380 |
| GÖTEBORG APPROACH | 124.680 |

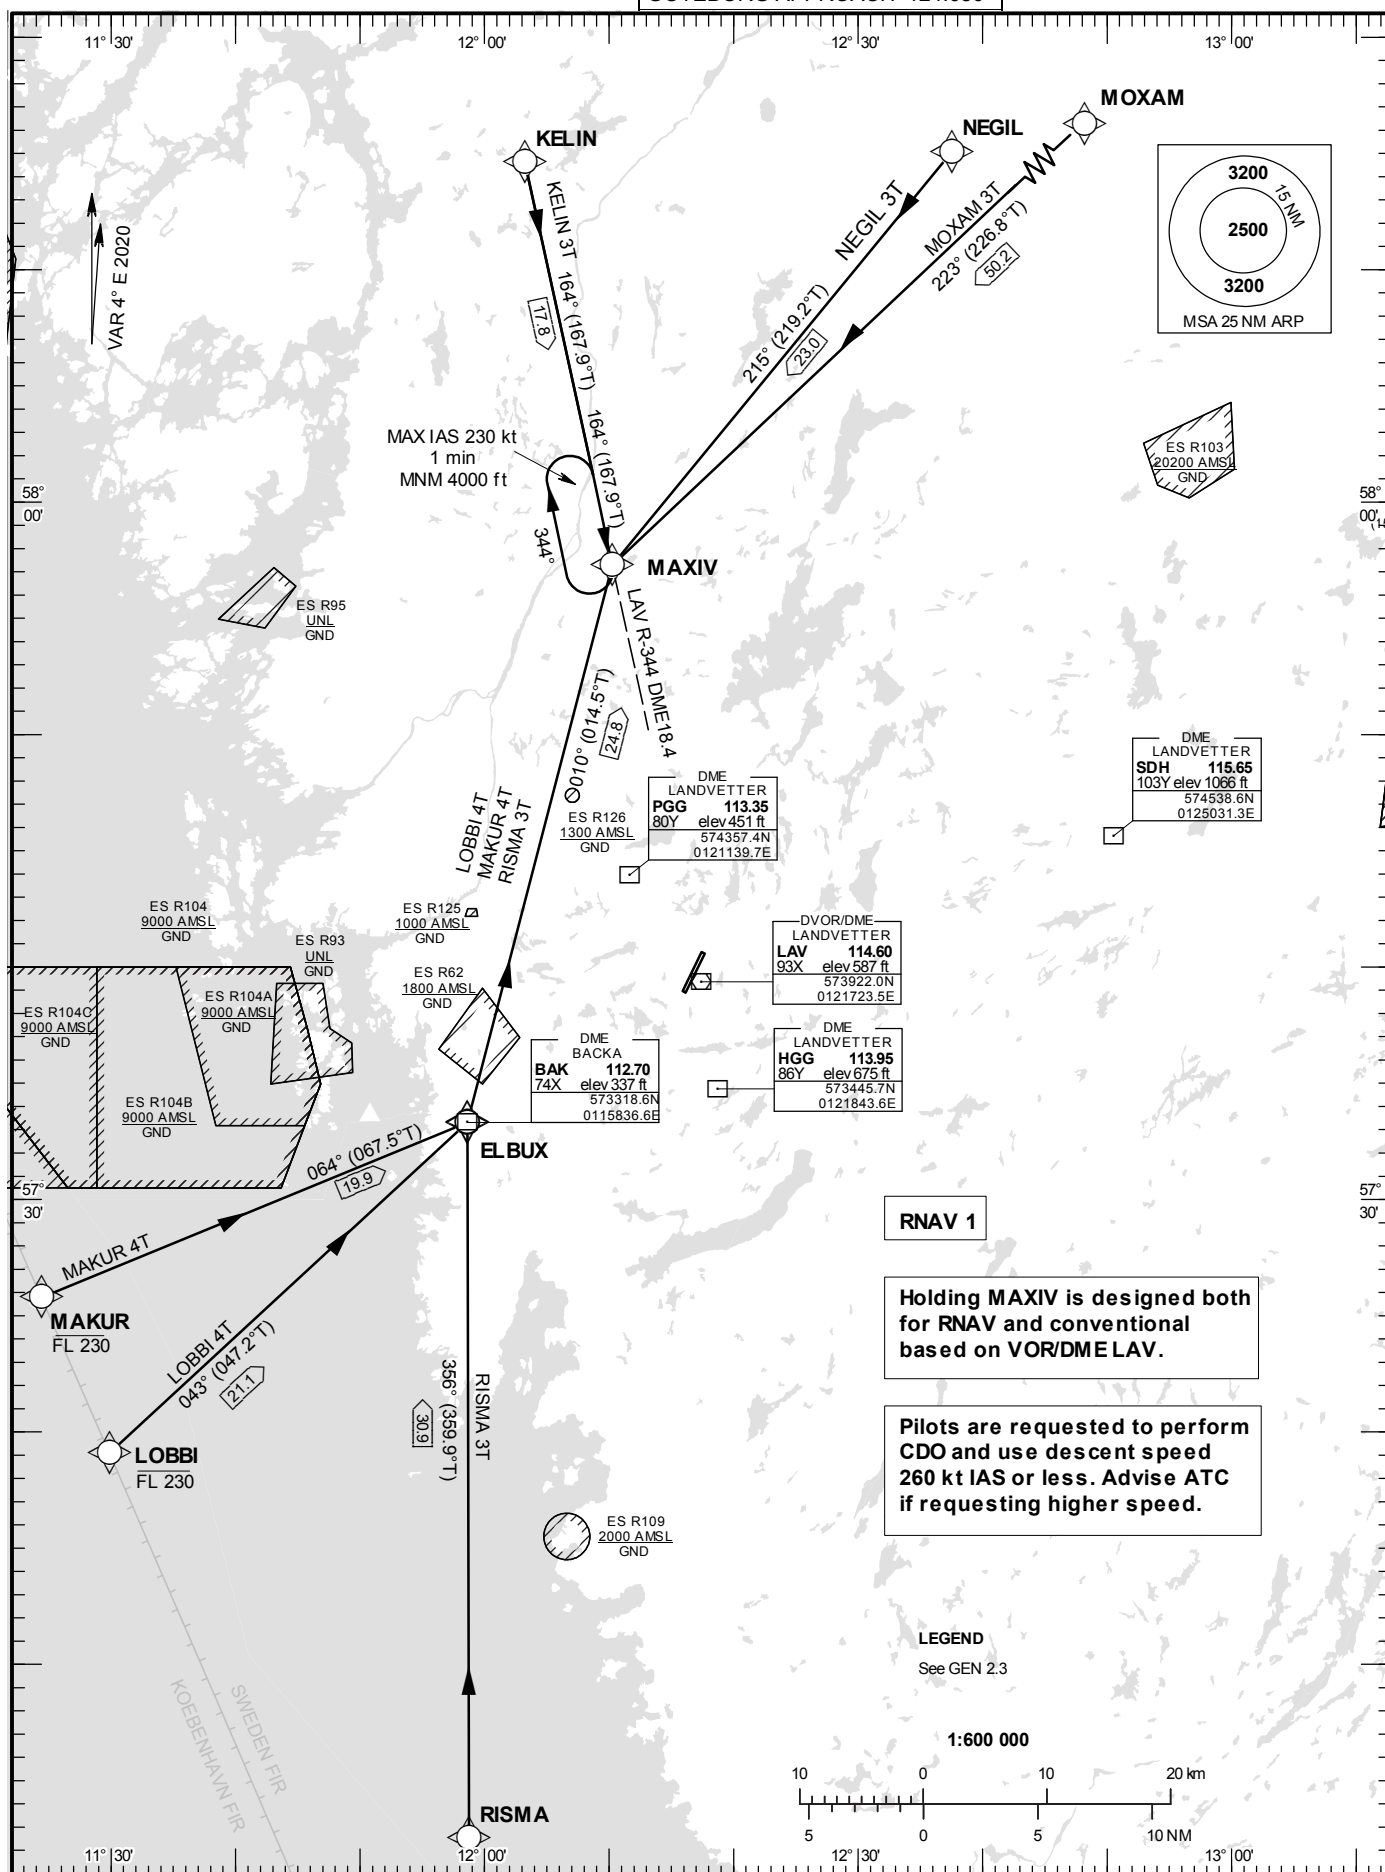

GÖTEBORG/Landvetter

Prescribed Coding of RNAV STAR (DME/DME or GNSS) for RWY 21

REMARK

Following RNAV STARs are named OPEN STARs and aircraft will be radar vectored to final.

RNAV STARs are based on RNAV 1.

Operators unable flying RNAV 1 shall inform ATC by using phraseology “UNABLE RNAV STAR”. Radar vectors will then be provided.

Pilots are requested to perform CDO and use descent speed 260 kt IAS or less. Advise ATC if requesting higher speed.

Aircraft to GÖTEBORG/Landvetter shall not be operated at an airspeed of more than 250 kt IAS below FL100 unless otherwise instructed.

When established on ILS final approach track, maintain 160 kt IAS or more until passing OM, unless otherwise instructed. If unable, inform ATC immediately.

In case of radio communication failure, see AD 2.22 para 4.

KELIN 3T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF        | KELIN               | -        | -             | -         | -        | -                   | -                 | -               | -          | RNAV 1                   |
| TF        | MAXIV               | -        | 164°(167.9°)  | 17.8      | -        | -                   | -                 | -               | -          | RNAV 1                   |

STAR instruction:           KELIN – MAXIV – radar vectors.

LOBBI 4T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF        | LOBBI               | -        | -             | -         | -        | -FL230              | -                 | -               | -          | RNAV 1                   |
| TF        | ELBUX               | -        | 043°(047.2°)  | 21.1      | -        | -                   | -                 | -               | -          | RNAV 1                   |
| TF        | MAXIV               | -        | 010°(014.5°)  | 24.8      | -        | -                   | -                 | -               | -          | RNAV 1                   |

STAR instruction:           LOBBI (FL230 or below) – ELBUX – MAXIV – radar vectors.

MAKUR 4T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF        | MAKUR               | -        | -             | -         | -        | - FL230             | -                 | -               | -          | RNAV 1                   |
| TF        | ELBUX               | -        | 064°(067.5°)  | 19.9      | -        | -                   | -                 | -               | -          | RNAV 1                   |
| TF        | MAXIV               | -        | 010°(014.5°)  | 24.8      | -        | -                   | -                 | -               | -          | RNAV 1                   |

STAR instruction:           MAKUR (FL230 or below) – ELBUX – MAXIV – radar vectors.

**MOXAM 3T**

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF        | MOXAM               | -        | -             | -         | -        | -                   | -                 | -               | -          | RNAV 1                   |
| TF        | MAXIV               | -        | 223°(226.8°)  | 50.2      | -        | -                   | -                 | -               | -          | RNAV 1                   |

STAR instruction: MOXAM – MAXIV – radar vectors.

**NEGIL 3T**

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF        | NEGIL               | -        | -             | -         | -        | -                   | -                 | -               | -          | RNAV 1                   |
| TF        | MAXIV               | -        | 215°(219.2°)  | 23.0      | -        | -                   | -                 | -               | -          | RNAV 1                   |

STAR instruction: NEGIL – MAXIV – radar vectors.

**RISMA 3T**

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF        | RISMA               | -        | -             | -         | -        | -                   | -                 | -               | -          | RNAV 1                   |
| TF        | ELBUX               | -        | 356°(359.9°)  | 30.9      | -        | -                   | -                 | -               | -          | RNAV 1                   |
| TF        | MAXIV               | -        | 010°(014.5°)  | 24.8      | -        | -                   | -                 | -               | -          | RNAV 1                   |

STAR instruction: RISMA – ELBUX – MAXIV – radar vectors.