


LULEÅ/Kallax  
ILS z or LOC z RWY 14


INSTRUMENT  
APPROACH  
CHART – ICAO

THR ELEV 65.3 ft, AD ELEV 65 ft  
OCH are related to THR.  
Circling OCH are related to AD ELEV.  
BRG are MAG  
ALT, HGT and ELEV in ft.

KALLAX TOWER	128.200
KALLAX APPROACH	125.450

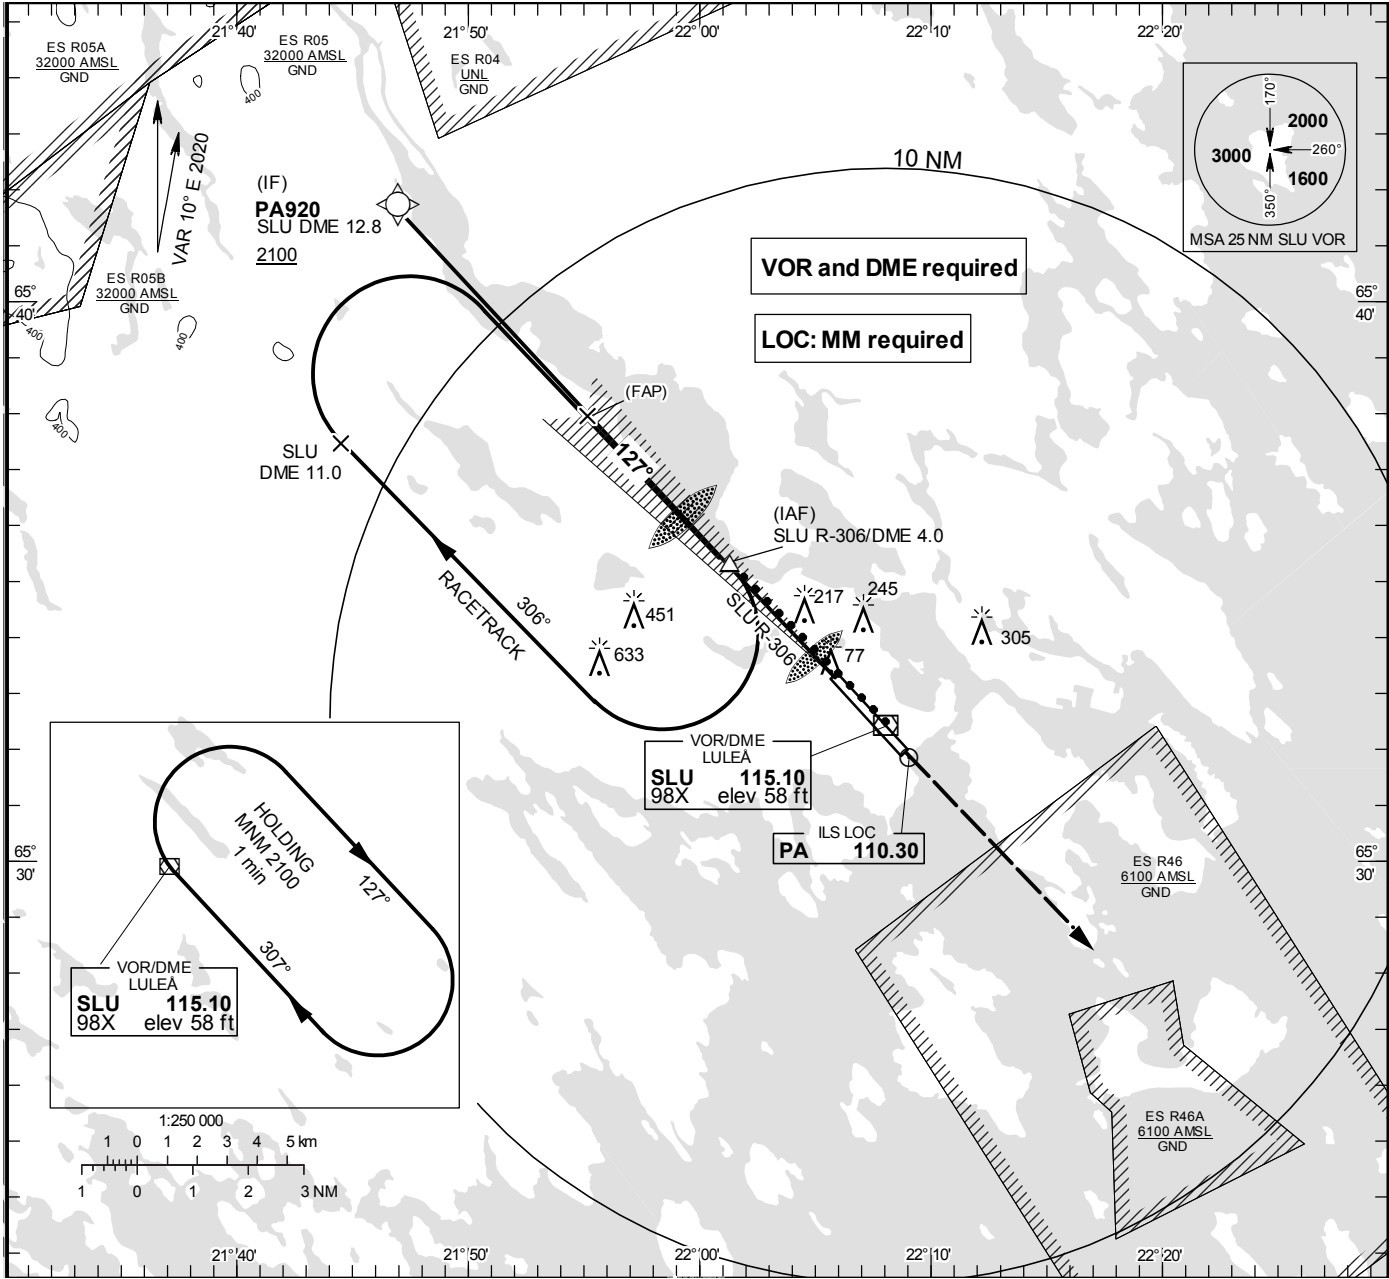

TA 5000 ft AMSL RDH 50.9 ft \*Timing not authorized for defining the MAPt

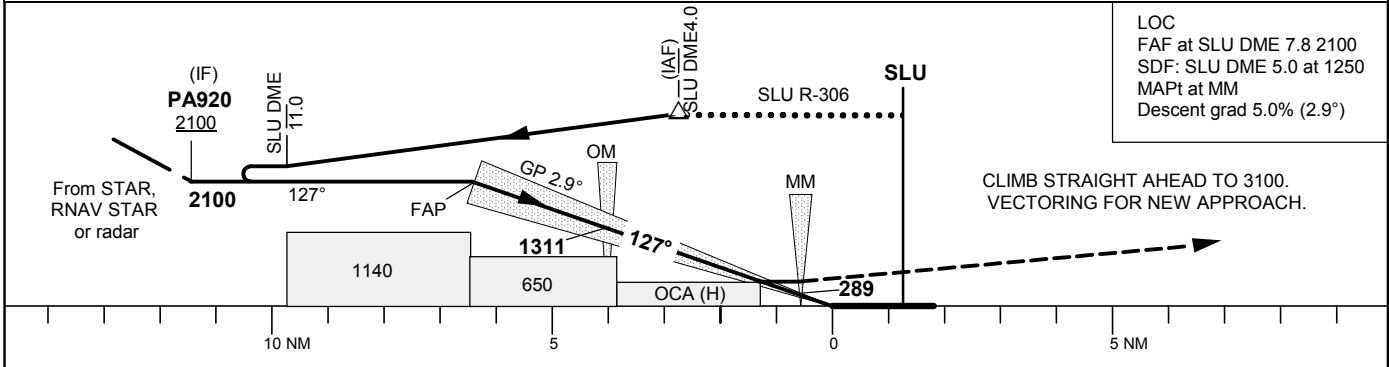

OCA (H)						Final approach	LOC Distance FAF-MAPt 6.0 NM*						
Cat of ACFT		A	B	C	D	DME SLU NM	7	6	5	4	3		
Straight-in Approach	CAT I	217 (152)	225 (160)	235 (170)	244 (179)	ALT	1860	1550	1250	950	640		
	LOC	450 (390)				GS	kt	80	100	120	140	160	180
						Time	min:s	4:28	3:35	2:59	2:33	2:14	1:59
						Rate of descent	ft/min	405	505	605	710	810	910
Circling		550 (490)	610 (550)	850 (790)	1030 (970)								

CHANGE: Editorial