


**STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO**

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

BORLÄNGE TOWER 127.305

**BORLÄNGE
RNAV RWY 14**

XOTBU 1E

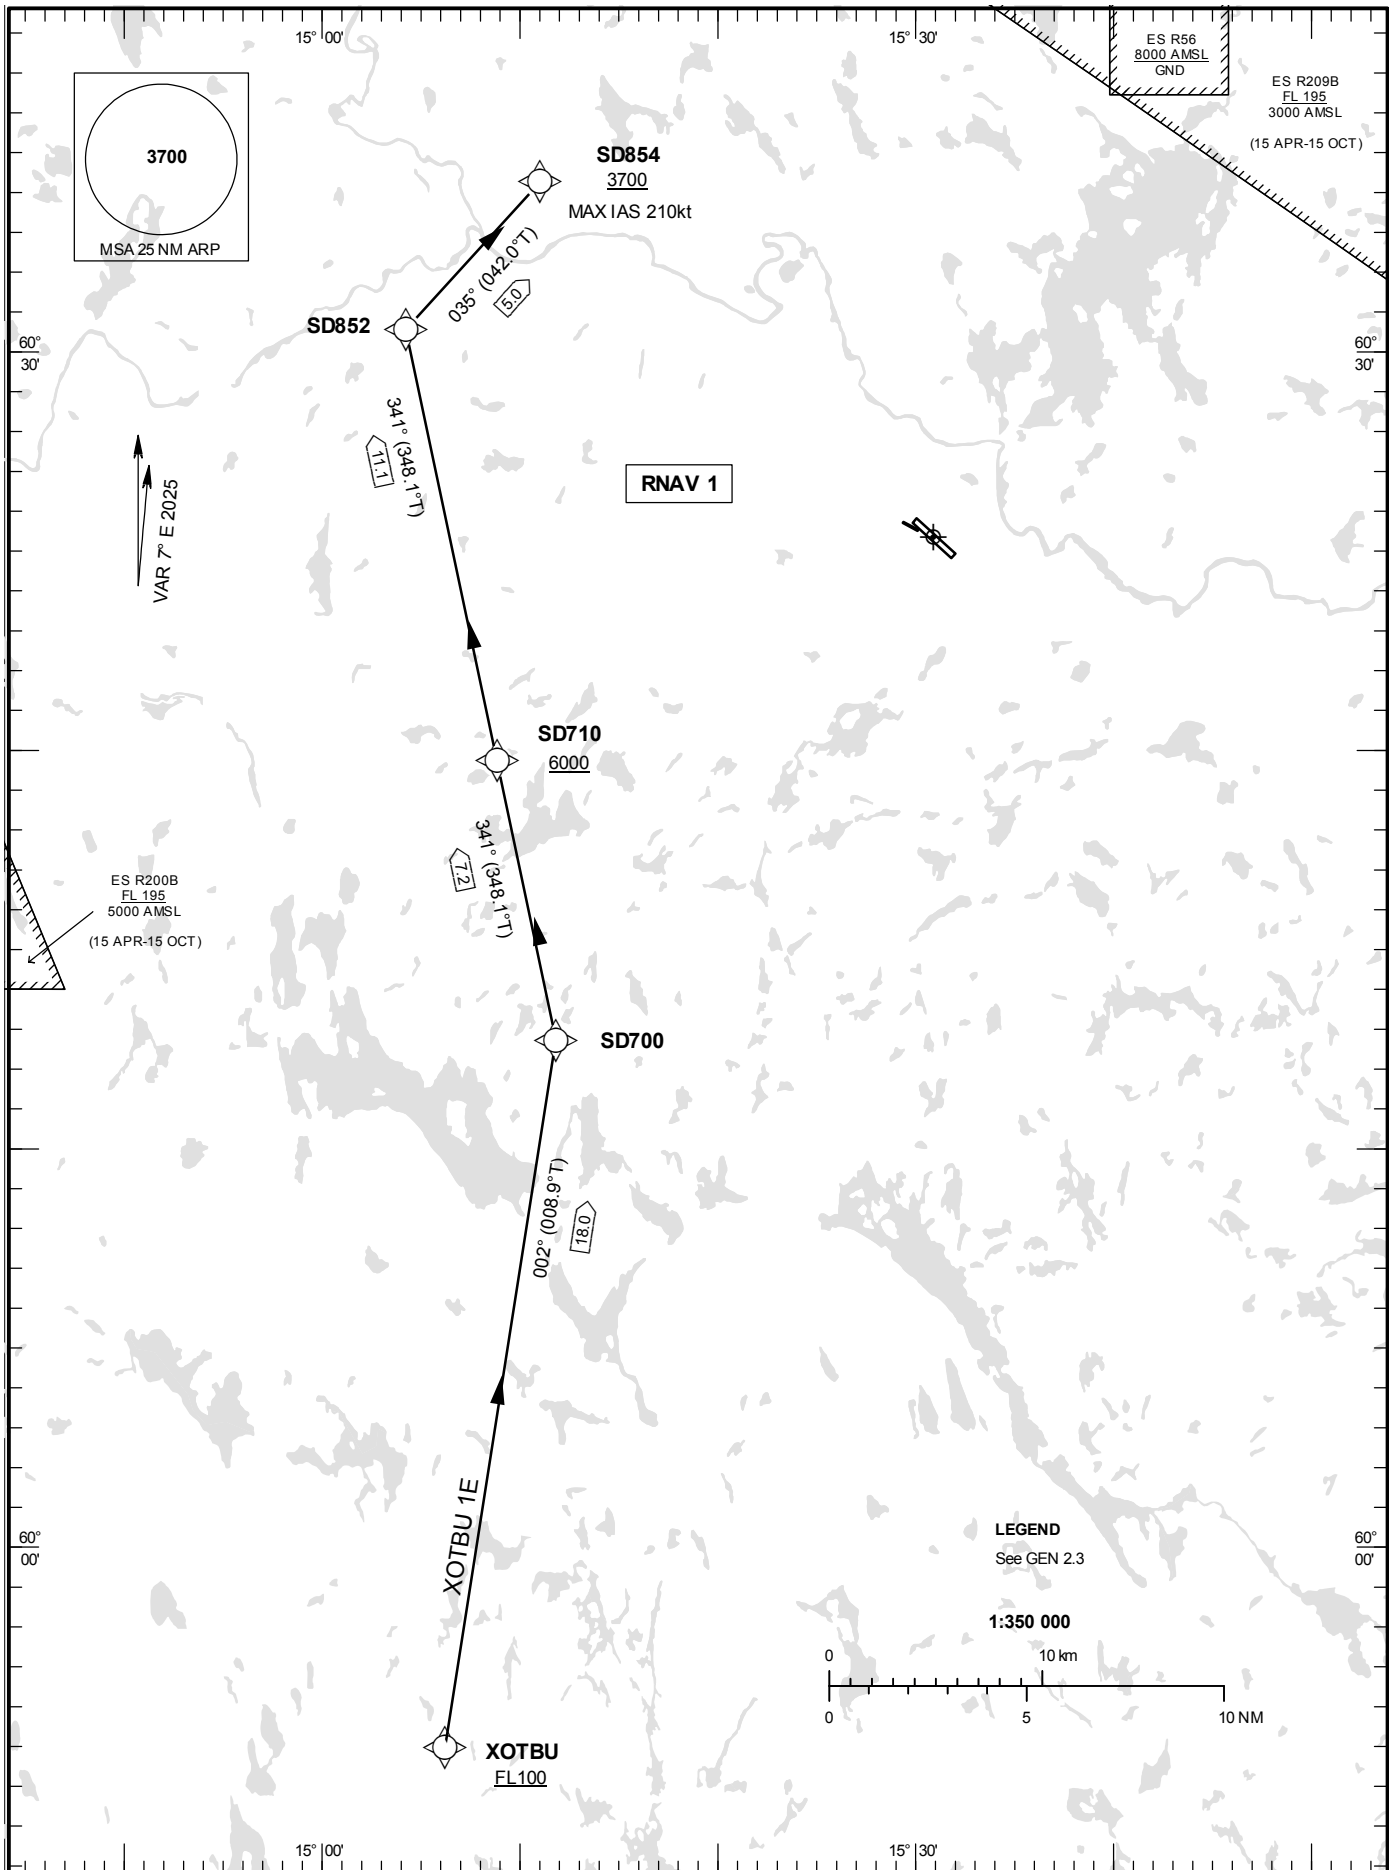

CHANGE: Editorial

BORLÄNGE

Prescribed Coding of RNAV STAR for RWY 14

XOTBU 1E

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	XOTBU	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	SD700	-	002°(008.9°)	18.0	-	-	-	-	-	RNAV 1
TF	SD710	-	341°(348.1°)	7.2	-	+6000	-	-		RNAV 1
TF	SD852	-	341°(348.1°)	11.1	-	-	-	-		RNAV 1
TF	SD854	-	035°(042.0°)	5.0	-	+3700	-210	-	-	RNAV 1

STAR instruction: XOTBU – SD700 – SD710 (6000 ft or above) – SD852 – SD854 (max IAS 210 kt, 3700 ft or above)