


**STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO**

HGT and ALT in ft
BRG are MAG
TA 5000 ft AMSL

| | |
|-----------------|---------|
| KALLAX TOWER | 128.200 |
| KALLAX APPROACH | 125.450 |

RNAV (GNSS) SID RWY 14

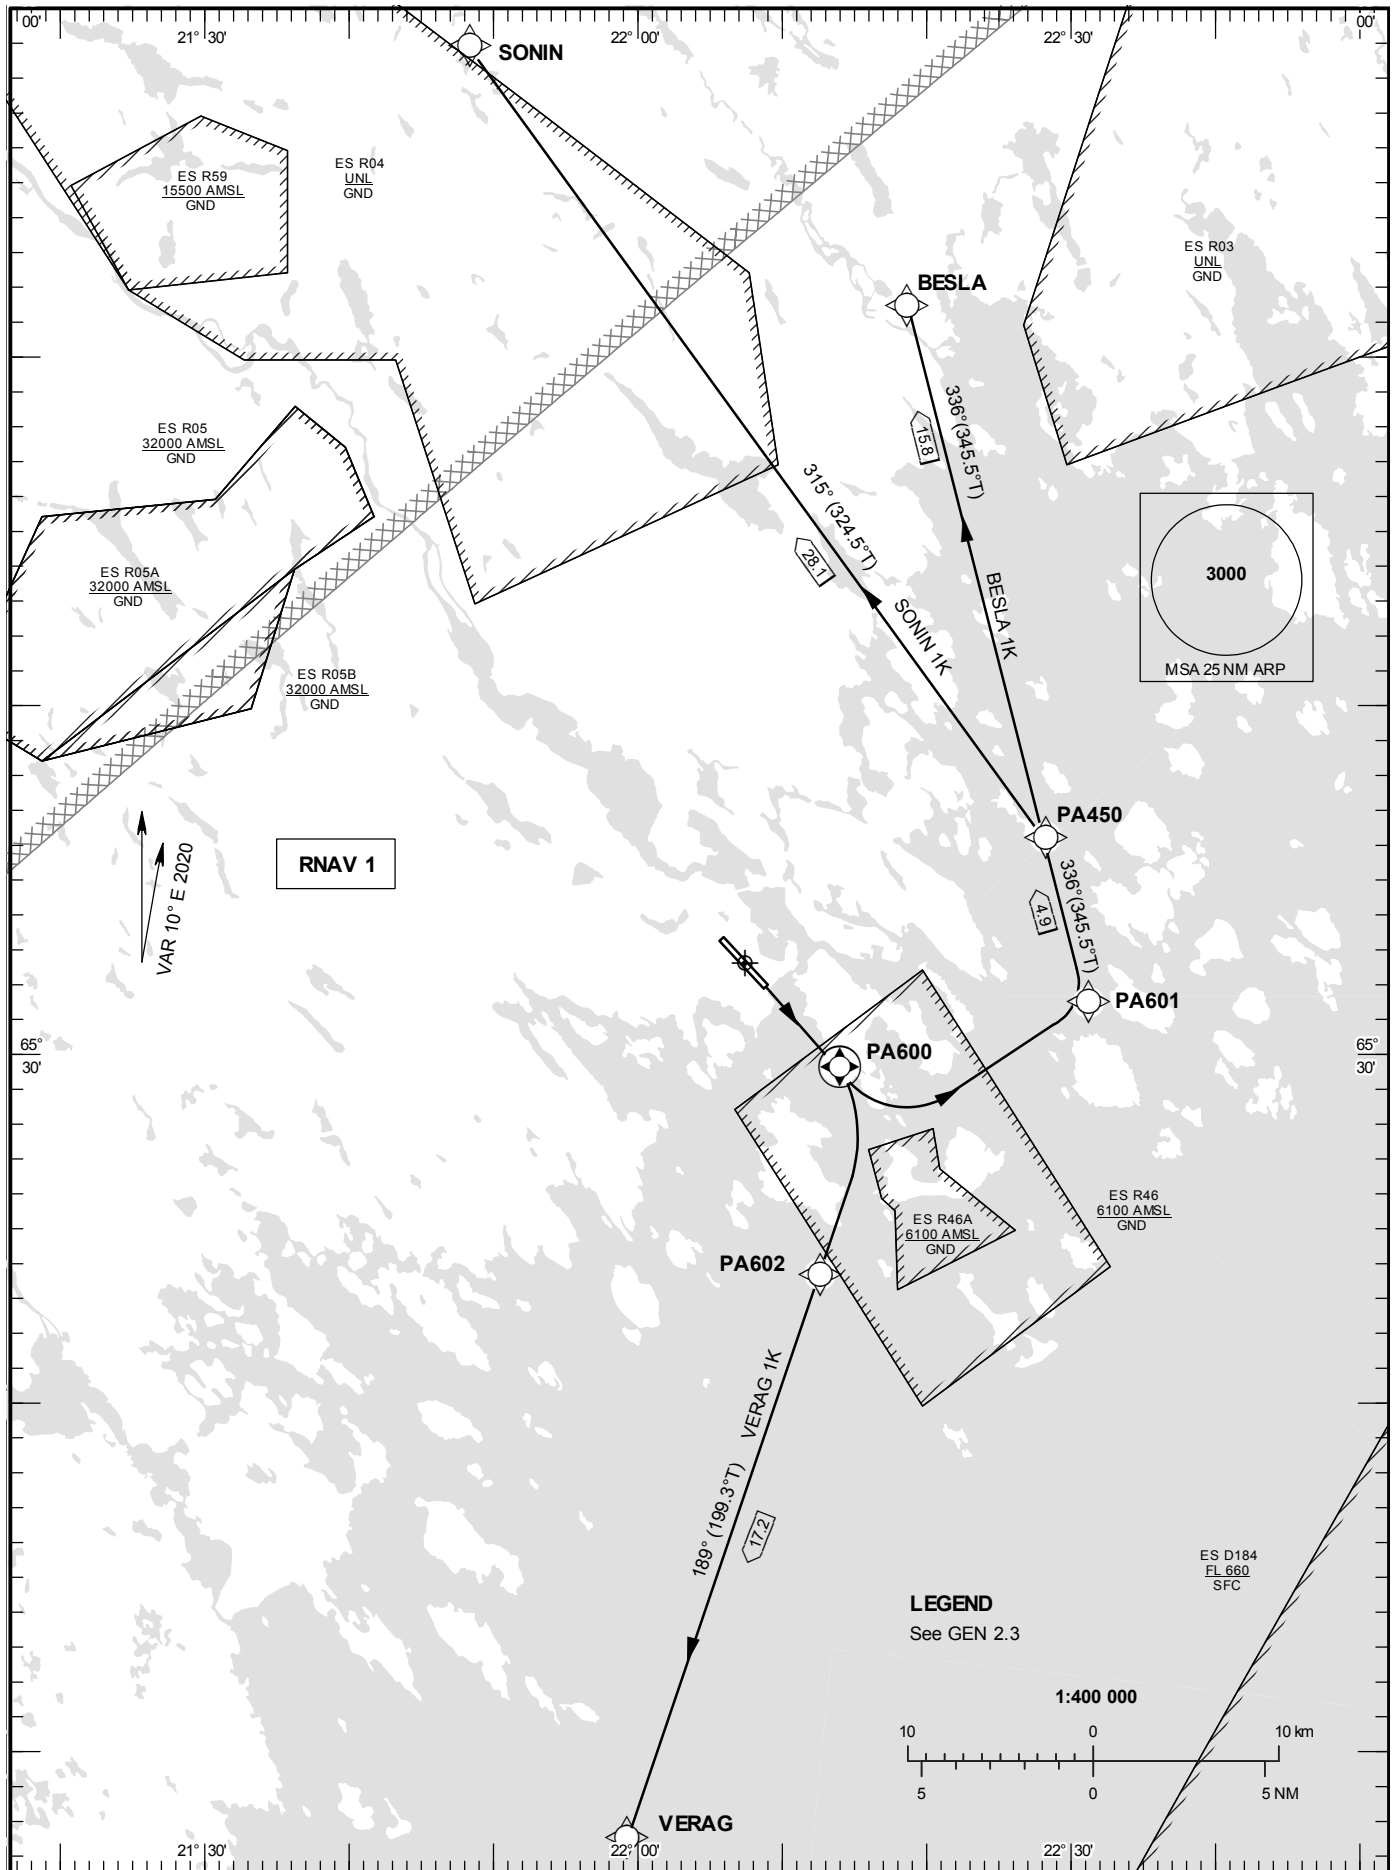

CHANGE: Editorial

LULEÅ/Kallax**Prescribed Coding of RNAV SID for RWY 14**

RNAV 1 for positioning update.

Operators unable to fly RNAV 1 shall inform ATC "UNABLE RNAV SID". Radar vectors will then be provided.

For ATC reasons, aircraft proceeding on SID shall use 6.6% (400 ft/NM) as minimum climb gradient. Aircraft unable to meet with this procedure shall inform ATC.

BESLA 1K

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| DF | PA600 | Y | - | - | - | - | - | - | - | RNAV 1 |
| DF | PA601 | - | - | - | L | - | -230 | - | - | RNAV 1 |
| TF | PA450 | - | 336°(345.5°) | 4.9 | - | - | - | - | - | RNAV 1 |
| TF | BESLA | - | 336°(345.5°) | 15.8 | - | - | - | - | - | RNAV 1 |

SID instruction: PA600 – PA601(max IAS 230kt until PA601) – PA450 – BESLA

SONIN 1K

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| DF | PA600 | Y | - | - | - | - | - | - | - | RNAV 1 |
| DF | PA601 | - | - | - | L | - | -230 | - | - | RNAV 1 |
| TF | PA450 | - | 336°(345.5°) | 4.9 | - | - | - | - | - | RNAV 1 |
| TF | SONIN | - | 315°(324.5°) | 28.1 | - | - | - | - | - | RNAV 1 |

SID instruction: PA600 – PA601(max IAS 230kt until PA601) – PA450 – SONIN

VERAG 1K

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| DF | PA600 | Y | - | - | - | - | - | - | - | RNAV 1 |
| DF | PA602 | - | - | - | R | - | - | - | - | RNAV 1 |
| TF | VERAG | - | 189°(199.3°) | 17.2 | - | - | - | - | - | RNAV 1 |

SID instruction: PA600 – PA602 – VERAG