


**RNAV (DME/DME or GNSS)
STAR RWY 26**

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

| | |
|--------------------|---------|
| ARLANDA TOWER | 118.505 |
| ARLANDA ATIS ARR | 119.005 |
| STOCKHOLM APPROACH | 123.755 |

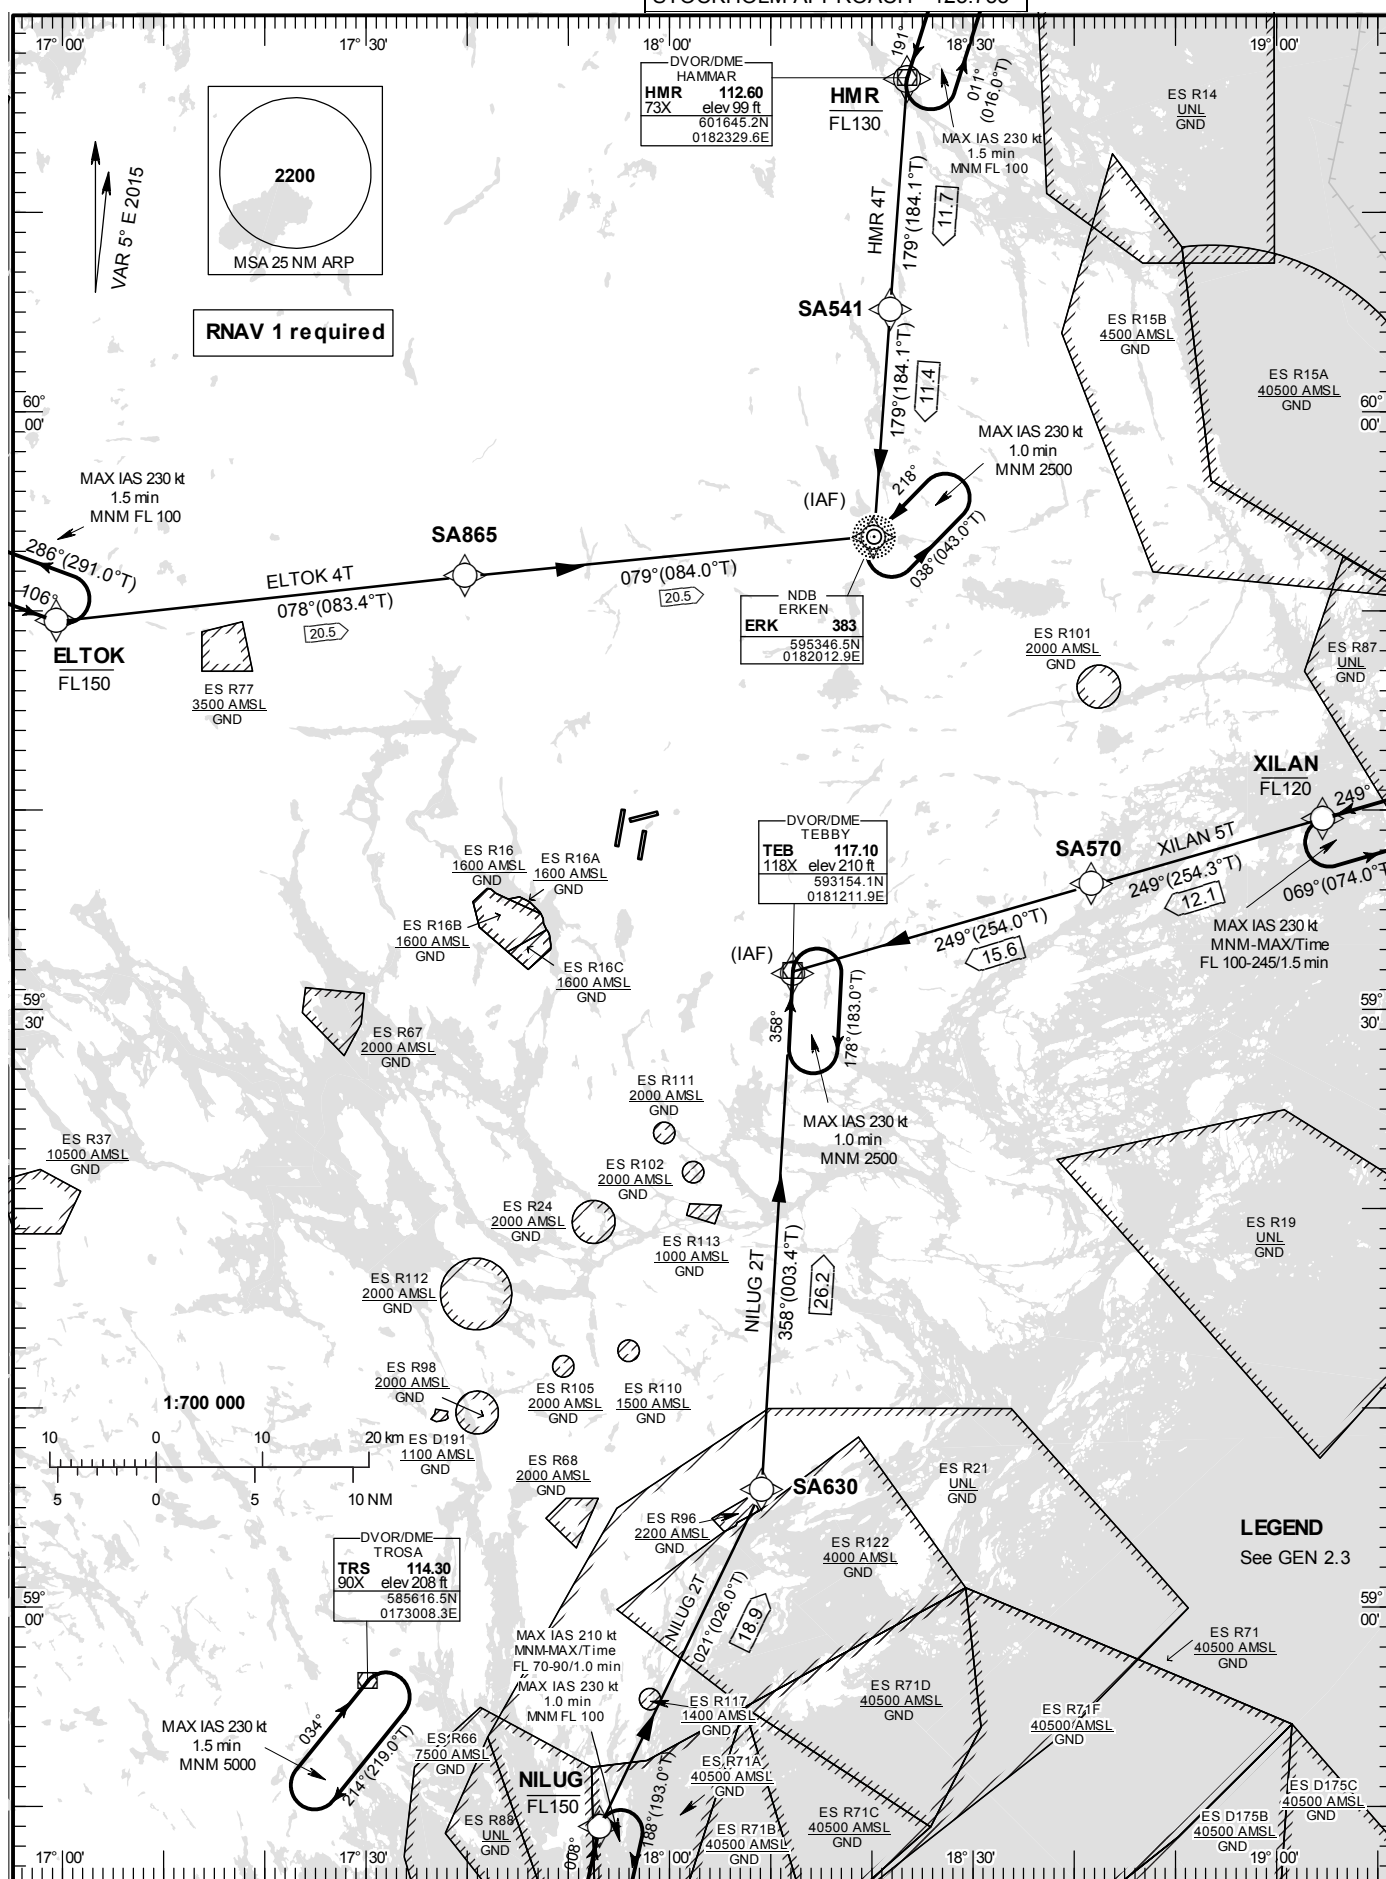

LEGEND
See GEN 2.3

STOCKHOLM/Arlanda**Prescribed Coding of RNAV STAR for RWY 26****REMARK**

Aircraft to STOCKHOLM/Arlanda shall not be operated at an airspeed of more than 250 kt IAS below FL100 unless otherwise instructed.

Clearance limit is normally the IAF.

From IAF aircraft will be radar vectored to final approach.

In case of radio communication failure, see AD 2.22 para 3.

All RNAV STARs are based on GNSS or DME/DME for position update.

ELTOK 4T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF | ELTOK | - | - | - | - | -FL150 | - | - | - | RNAV1 |
| TF | SA865 | - | 078°(083.4°) | 20.5 | - | - | - | - | - | RNAV1 |
| TF | ERK | - | 079°(084.0°) | 20.5 | - | - | - | - | - | RNAV1 |

STAR instruction: ELTOK (FL150 or below) – SA865 – ERK

HMR 4T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF | HMR | - | - | - | - | -FL130 | - | - | - | RNAV1 |
| TF | SA541 | - | 179°(184.1°) | 11.7 | - | - | - | - | - | RNAV1 |
| TF | ERK | - | 179°(184.1°) | 11.4 | - | - | - | - | - | RNAV1 |

STAR instruction: HMR (FL130 or below) – SA541 – ERK

NILUG 2T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF | NILUG | - | - | - | - | -FL150 | - | - | - | RNAV1 |
| TF | SA630 | - | 021°(026.0°) | 18.9 | - | - | - | - | - | RNAV1 |
| TF | TEB | - | 358°(003.4°) | 26.2 | - | - | - | - | - | RNAV1 |

STAR instruction: NILUG (FL150 or below) – SA630 – TEB

XILAN 5T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/ RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|-----------------|------------|--------------------------|
| IF | XILAN | - | - | - | - | -FL120 | - | - | - | RNAV1 |
| TF | SA570 | - | 249°(254.3°) | 12.1 | - | - | - | - | - | RNAV1 |
| TF | TEB | - | 249°(254.0°) | 15.6 | - | - | - | - | - | RNAV1 |

STAR instruction: XILAN (FL120 or below) – SA570 – TEB