



# INSTRUMENT APPROACH CHART – ICAO

ARLANDA TOWER	118.505/ 125.130/128.730
ARLANDA ATIS ARR	119.005
STOCKHOLM APPROACH	123.755

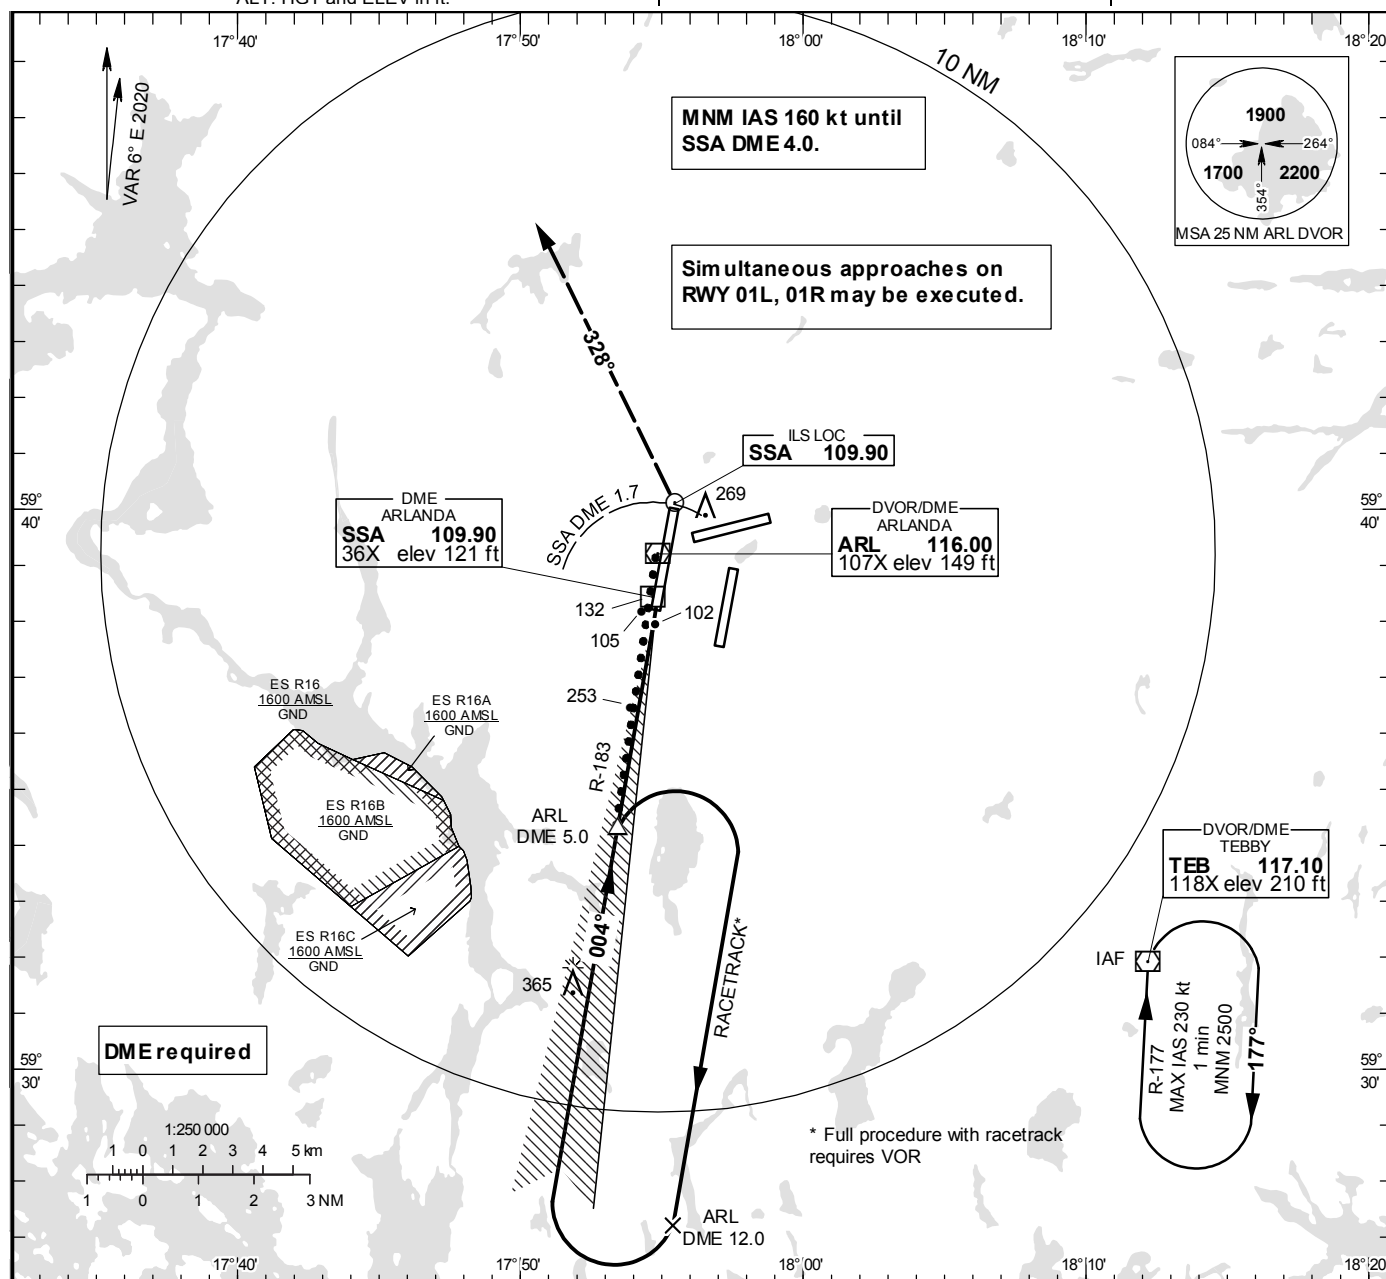

TA 5000 ft AMSL    RDH 56.1 ft    Special Com Failure Procedures see ESSA AD    \* Timing not authorized for defining the MAPt

OM replaced by SSA DME 4.0  
MM replaced by SSA DME 0.8

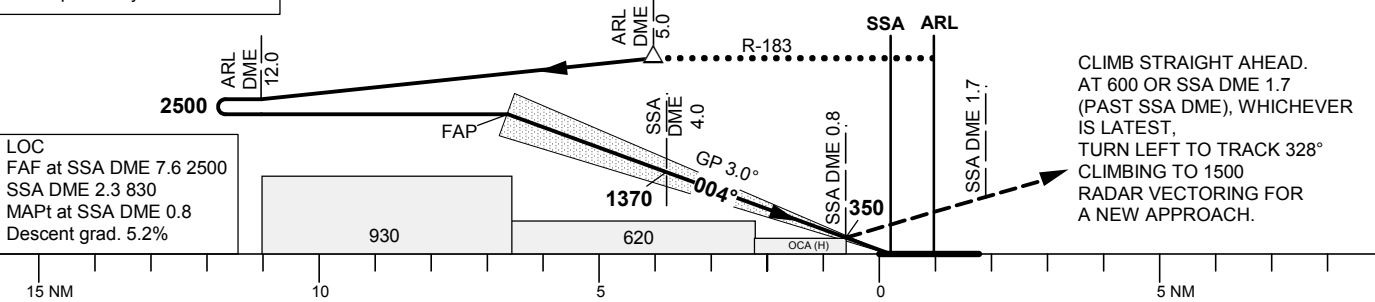

OCA (H)						Final approach	LOC Distance FAF-MAPT 6.8 NM*						
Cat of ACFT		A	B	C	D	DL	DME SSA NM	7	6	5	4	3	2
Straight-in Approach	Cat I	240 (142)	249 (151)	259 (161)	272 (174)	274 (176)	ALT	2320	2010	1690	1370	1050	730
	Cat II	150 (52)	159 (61)	172 (74)	185 (87)	187 (89)	GS	kt	80	100	120	140	160
	LOC	510 (410)					Time	min:s	5:04	4:03	3:23	2:54	2:32
	Cat III B Approved						Rate of descent	ft/min	425	530	635	745	850