


**STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO**

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

HALMSTAD TOWER	130.105
	135.055

RNAV (GNSS) SID RWY 01

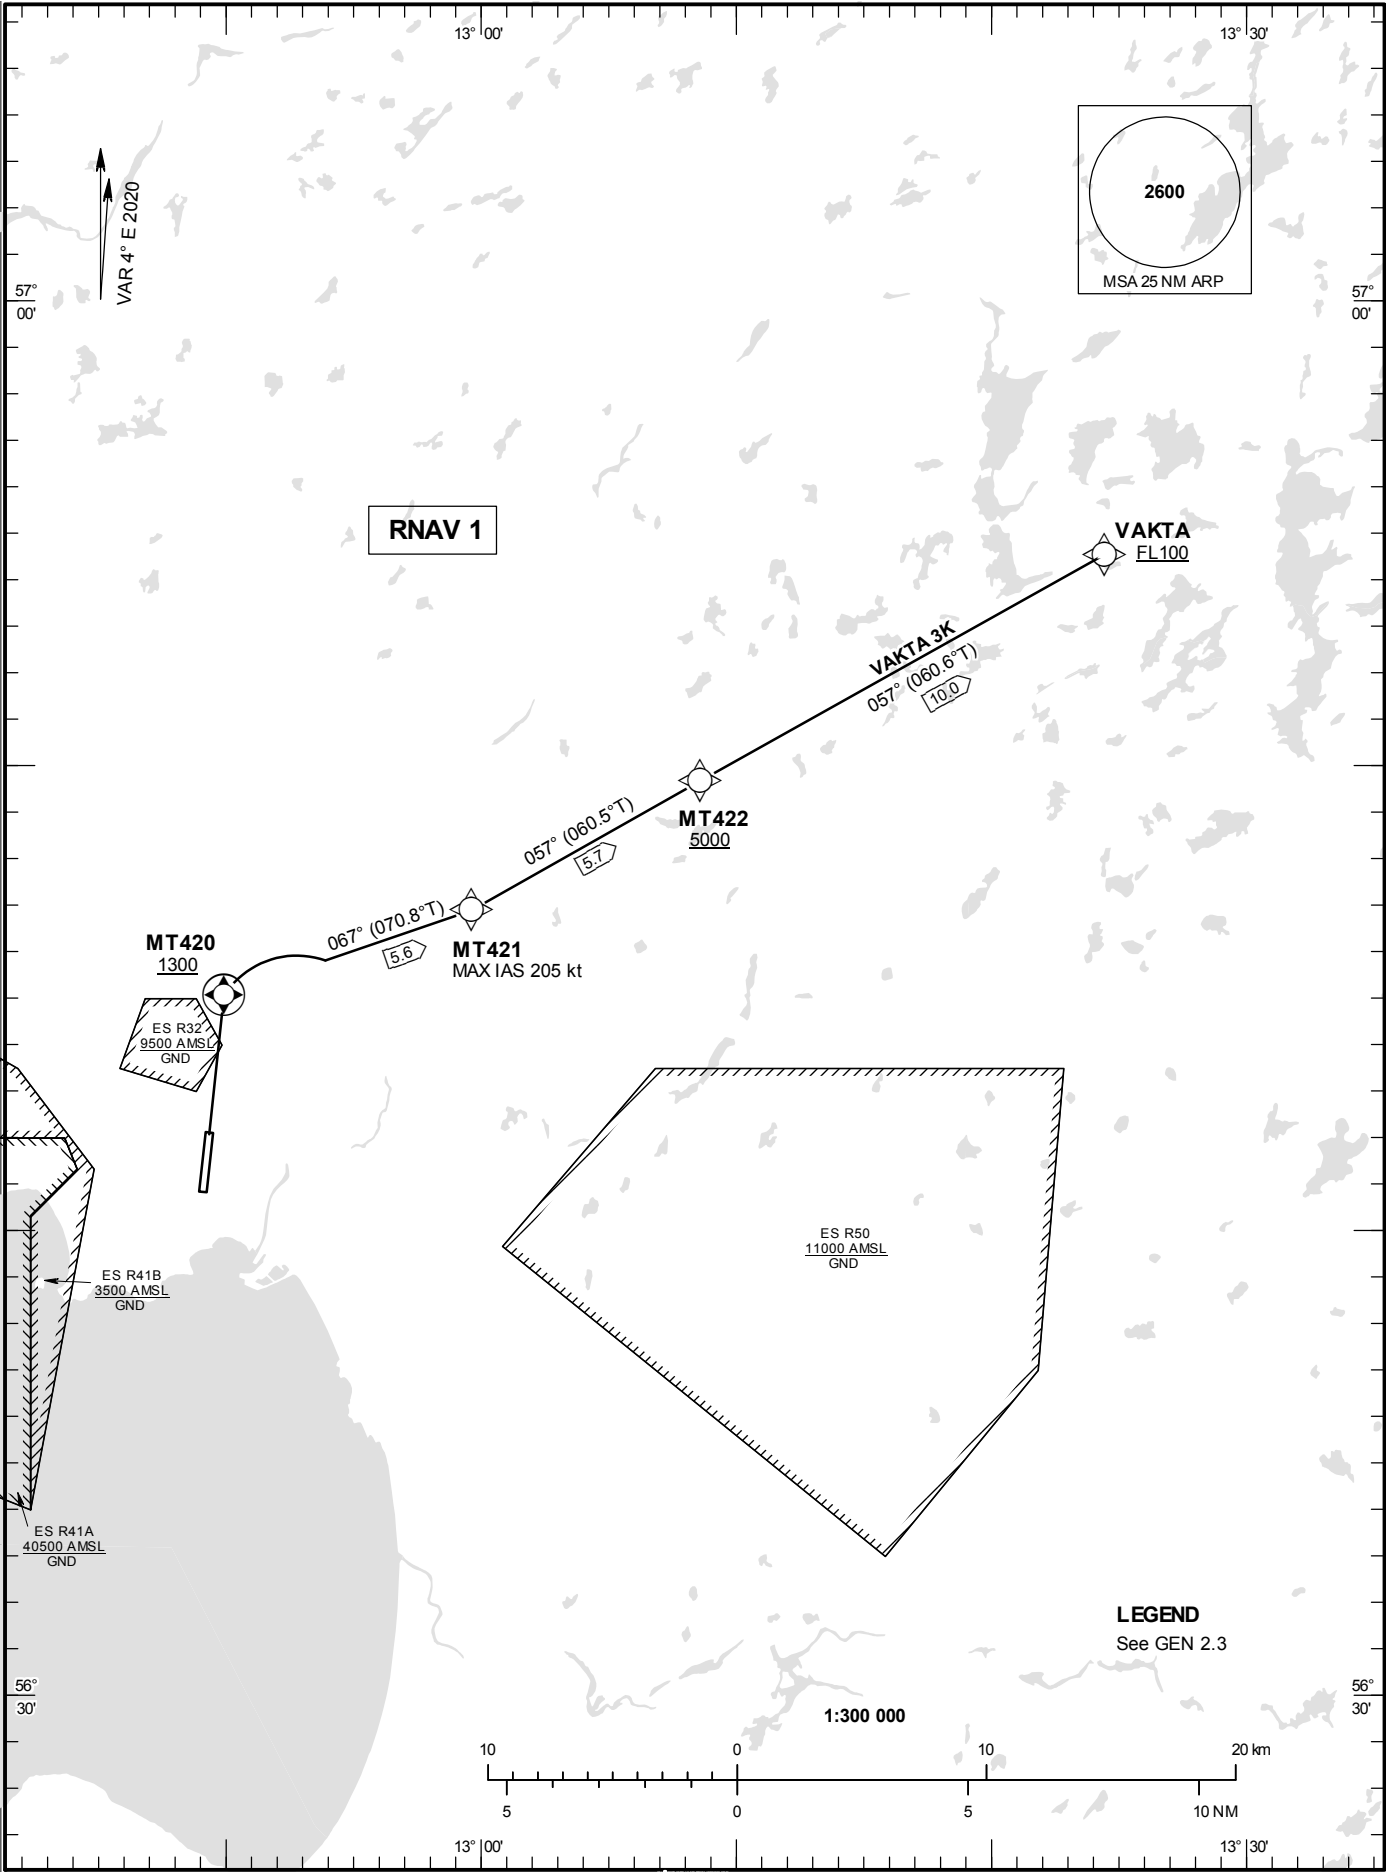

CHANGE: Editorial

HALMSTAD

Prescribed Coding of RNAV SID for RWY 01

VAKTA 3K

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/ RDH	Rec Navaid	Navigation Specification
DF	MT420	Y	-	-	-	+1300	-	-	-	RNAV 1
TF	MT421	-	067°(070.8°)	5.6	R	-	-205	-	-	RNAV 1
TF	MT422	-	057°(060.5°)	5.7	-	+5000	-	-	-	RNAV 1
TF	VAKTA	-	057°(060.6°)	10.0	-	+FL100	-	-	-	RNAV 1

SID instruction: MT420 (min 1300 ft, min PDG 6.6 % (410 ft/NM) until MT420) – MT421 (max IAS 205 kt until MT421) – MT422 (min 5000 ft) – VAKTA (min FL100)