

ARP 653525N 0191655E


AD ELEV 1245 FEET

LEGEND See GEN 2.3

Dimensions in m, ELEV in ft

TWY NR	WIDTH	Surface Bearing strength	Day marking		Taxiway lighting	
			Centerline Holding	Edge	Centerline	Stopbar
A	23 m	ASPH PCN 39 F/B/X/U	CL HLDG	EDGE	RGL	RGL
B	23 m	ASPH PCN 39 F/B/X/U	CL HLDG	EDGE	RGL	RGL

INS Coordinates for Aircraft Stands			
APRON Surface Bearing strength	NR	COORD	ELEV
1 ASPH PCN 39 F/B/X/U			

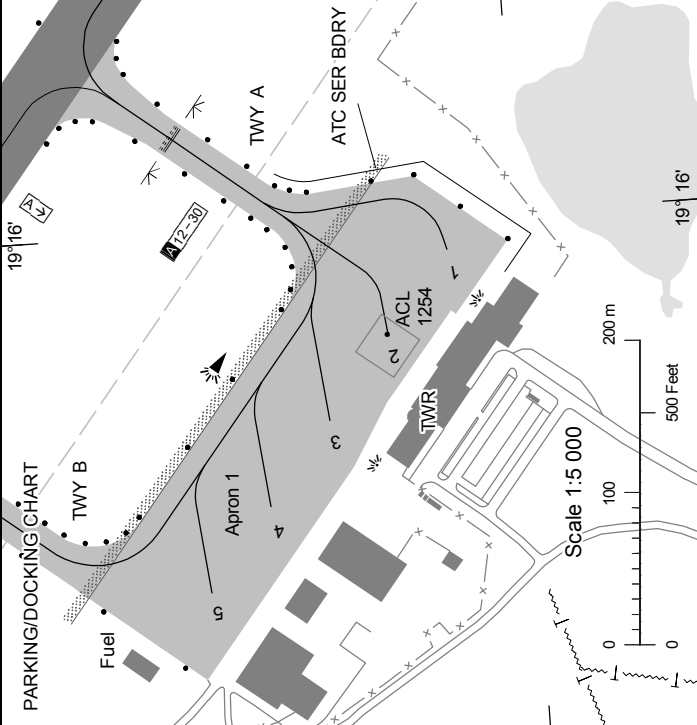

RWY NR	TRUE & MAG BRG	THR PSN Geoid undulation	Bearing strength	THR ELEV and highest ELEV of TDZ of precision APCH RWY	Declared distances				Approach and runway lighting				
					TORA	TODA	ASDA	LDA	APCH	THR TRID TDZ	VASIS (MEHT)	Edge	End
12	128.19° GEO 120° MAG	653554.80N 0191522.22E GUND 92 ft	PCN 39 F/B/X/U	THR 1242.0 ft TDZ 1245 ft	2500	2500	2500	2500	Barrette CL Cat I 720 m LIL/LIH	THR Green	PAPI Left 3.00° (52.5 ft)	2500/60 m White Caution zone 600 m yellow LIL/LIH	Red
30	308.23° GEO 300° MAG	653504.88N 0191755.52E GUND 92 ft	PCN 39 F/B/X/U	THR 1240.1 ft TDZ 1240 ft	2500	2500	2500	2500	Calvert Cat I 900 m LIL/LIH	THR Green WBAR	PAPI Left 3.00° (55.8 ft)	2500/60 m White Caution zone 600 m yellow LIL/LIH	Red