ÖRNSKÖLDSVIK
ILS z or LOC z RWY 12

INSTRUMENT APPROACH CHART – ICAO

THR ELEV 354.1 ft, AD ELEV 355 ft
OCH are related to THR.
Circling OCH are related to AD ELEV.
BRG are MAG
ALT. HGT and ELEV in ft.

ÖVIK TOWER	122.255

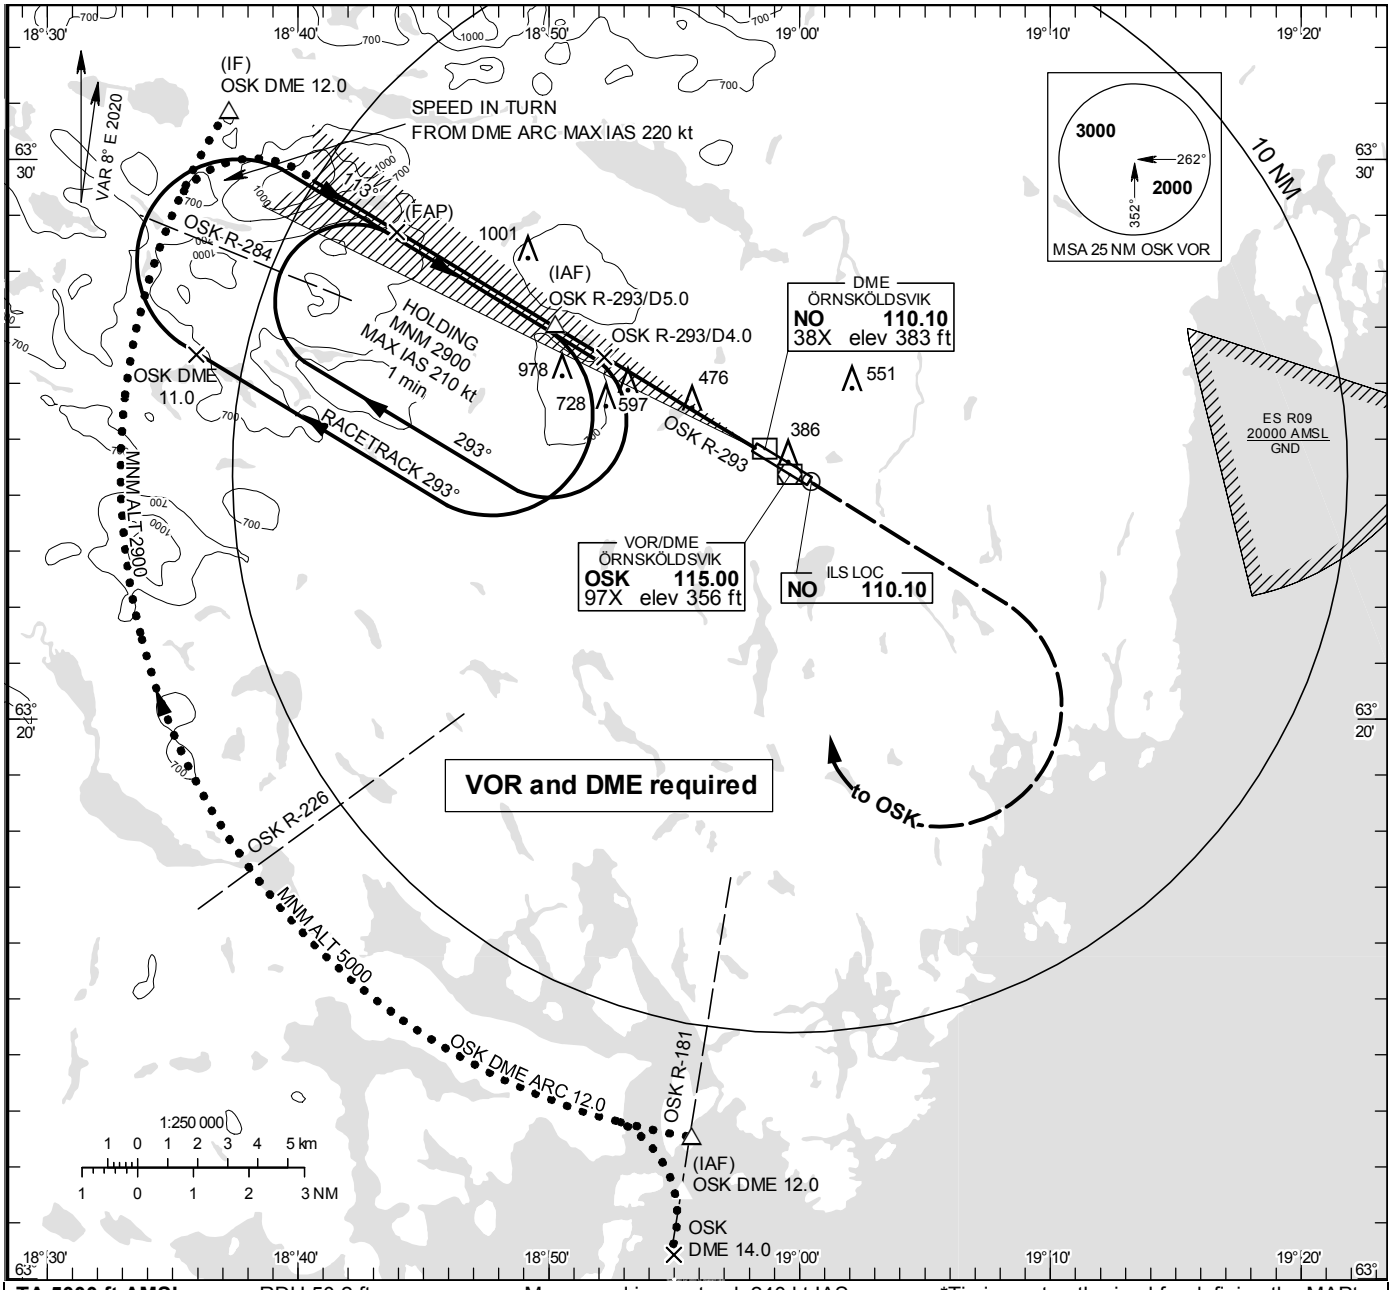

TA 5000 ft AMSL RDH 50.2 ft Max speed in racetrack 240 kt IAS *Timing not authorized for defining the MAPt

OM replaced by NO DME 4.0
MM replaced by NO DME 0.7

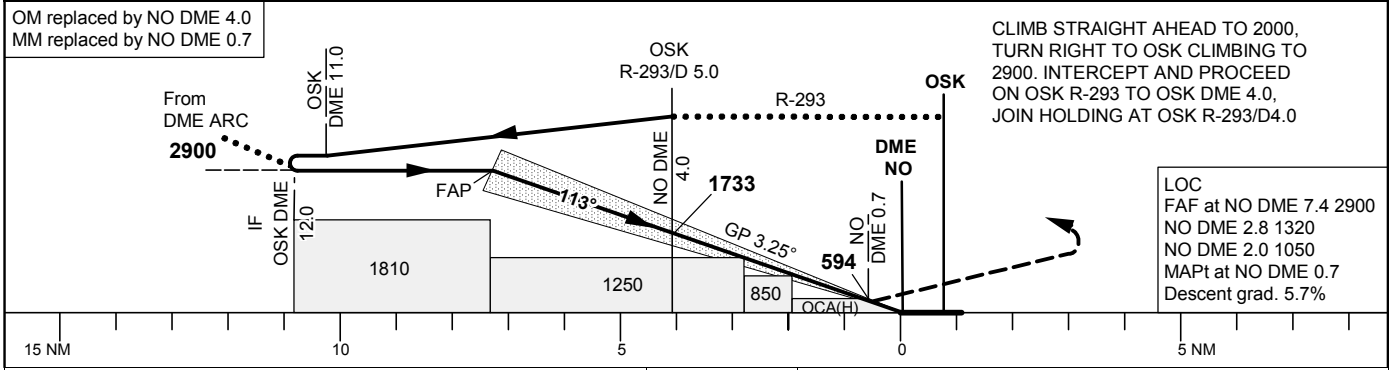

CLIMB STRAIGHT AHEAD TO 2000, TURN RIGHT TO OSK CLIMBING TO 2900. INTERCEPT AND PROCEED ON OSK R-293 TO OSK DME 4.0, JOIN HOLDING AT OSK R-293/D4.0

LOC
FAF at NO DME 7.4 2900
NO DME 2.8 1320
NO DME 2.0 1050
MAPt at NO DME 0.7
Descent grad. 5.7%

OCA (H)						Final approach	LOC Distance FAF-MAPt 6.7 NM*					
Cat of ACFT		A	B	C	D	DME NO NM	7	6	5	4	3	2
Straight-in Approach	CAT I	498(144)	508(154)	518(164)	528(174)	ALT	2770	2420	2080	1730	1390	1040
	LOC	730(380)				GS kt	80	100	120	140	160	180
Circling		850(500)	1030(680)	1380(1030)	1400(1050)	Rate of descent ft/min	460	575	690	805	920	1035

CHANGE: Editorial